




NORDIC AQUA
SOLUTIONS

PE 100 Fittings for Gas & Water Transmission Systems

PE100 stuk-el & el-fittings for gas og vand



PRODUCT CATALOGUE
Produktkatalog

2019-

Export Countries
Eksport lande



NTG produces only Fittings
NTG producere kun fittings

NTG Design, Production and Sales activities are subject to constant quality checks under strict inspection regulations which is certified under EN 1555-3, EN 12201-3, AS/NZS 4129, GW 335-B2, respectively ISO 4427, ISO 4437 and DIN 16963

NTG branded fittings are licensed for use in gas and water supply. They have been registered by DVGW and are subjected to permanent quality controls and regular outside monitoring

NTG Plastik har specialiseret sig i byggematerialer, blev grundlagt i 1978 og begyndte sine aktiviteter i 2002 med produktion af polyethylenarmaturer til gas- og vandforsyning. Produktionsfaciliteterne er samlet på et areal på 16.000 m², inderholder en forsknings- og udviklingsafdeling, en støberiafdeling med high-tech faciliteter og et laboratorium, der arbejder i henhold til internationale standarder

NTG's forretningsstrategi er fokuseret på kunderne og derfor tilbyder NTG nøjagtige og hurtige løsninger efter kundernes krav og ønsker med deres dygtige salgsteam, stærke organisation og logistik.

NTG er et brand, som står for kvalitet på hele verdensmarkedet. De eksporterer 70% af produktionen til mere end 50 lande over hele verden, hovedsagelig Europa. De er stærke med unikke løsninger, miljøvenlige og effektive teknologiske løsninger. NTG er et velkendt brand på det globale marked og kvalitet vil altid være hovedmålet for NTG.







THE FIRE PIPELINES ARE MORE SECURE WITH “FM APPROVED” NTG PRODUCTS

FM godkendt produkter fra NTG



SPIGOT

ELBOW 90° PE 100 SDR11	8
ELBOW 45° PE 100 SDR11	9
ELBOW 11° PE 100 SDR11	10
ELBOW 22° PE 100 SDR11	11
ELBOW 30° PE 100 SDR11	12
ELBOW 60° PE 100 SDR11	13
TEE 90°, EQUAL PE 100 SDR11	14
WYE TEE 45°, PE 100 SDR11	15
TEE 90°, REDUCED PE 100 SDR11	16
REDUCER PE 100 SDR11	18
STEP REDUCER PE 100 SDR11	20
END CAP PE 100 SDR11	21
FLANGE ADAPTOR PE 100 SDR11	22
FLANGE ADAPTOR (ANSI) PE 100 SDR11	25

FLANGES

BACKING FLANGE, PP-STEEL (METRIC)	28
BACKING FLANGE, PP-STEEL (ANSI)	29

TRANSITION FITINGS

TRANSITION ADAPTOR PE	30
TRANSITION ADAPTOR PE-BRASS (MS58)	31
TRANSITION ADAPTOR PE-STEEL	33

ELECTROFUSION

EF COUPLER PE 100 SDR11	34
EF ELBOW 90° PE 100 SDR11	35
EF ELBOW 45° PE 100 SDR11	35
EF TEE 90°, EQUAL PE 100 SDR11	36
EF 90° TEE, REDUCED PE 100 SDR11	36
EF REDUCER PE 100 SDR11	37
EF TAPPING SADDLE PE 100 SDR11	38
EF TAPPING VALVE PE 100 SDR11	41
EF SPIGOT SADDLE PE 100 SDR11	44
EF REPAIR SADDLE PE 100 SDR11	44
EF SADDLE-PE TRANSITION	45
EF SADDLE-BRASS TRANSITION	46
EF BALLOON SADDLE PE 100 SDR11	47

UNIT WEIGHT OF PE 100 PIPES

48

Stuk-el

Vinkel 90° PE100 SDR11/17	
Vinkel 45° PE100 SDR11/17	
Vinkel 11° PE100 SDR11/17	
Vinkel 22° PE100 SDR11/17	
Vinkel 30° PE100 SDR11/17	
Vinkel 60° PE100 SDR11/17	
Tee 90° PE100 SDR11/17	
Tee 45° PE100 SDR11/17	
Tee 90°, reduceret PE100 SDR11/17	
Reduktion PE100 SDR11/17	
Step reduktion PE100 SDR11/17	
Slutmuffe PE100 SDR11/17	
Flange adapter PE100 SDR11/17	
Flange adapter (ANSI) PE100 SDR11/17	

Flanger m/stållindlæg

Løs flange PP/stål, metrisk	
Løs flange PP/stål, ANSI	

Gevind overgange

Gevind overgang PE	
Gevind overgnag PE/messing	
Gevind overgang PE/stål	

Elektrofittings

Muffer PE100 SDR11/17	
Vinkel 90° PE100 SDR11	
Vinkel 45° PE100 SDR11	
Tee 90° PE100 SDR11	
Tee 90° reduceret PE100 SDR11	
Reduktion PE100 SDR11	
Anbringssadel m/fræser PE100 SDR11	
Anbringssadel m/ventil PE100 SDR11	
Sadel tee PE100 SDR11	
Reparationssadel PE100 SDR11	
Sadel m/ PE gevind	
Sadel m/messing gevind	
Ballon sadel PE100 SDR11	

ENHEDSVÆGT AF PE 100-RØR



NORDIC AQUA SOLUTIONS

QUALITY STANDARTS

KVALITETSTANDARDER

NTG Design, Production and Sales activities are subject to constant quality checks under strict inspection regulations which is certified to EN ISO 9001:2015 to maximize the Customer Satisfaction.

As General, Geometrical, Mechanical, Physical Characteristics and Performance Requirements, fittings comply with the requirements under EN 1555-3, EN 12201-3, AS/NZS 4129, GW 335-B2, respectively ISO 4427, ISO 4437 and DIN 16963

NTG branded fittings are licensed for use in gas and water supply. They have been registered by DVGW and are subjected to permanent quality controls and regular outside monitoring.

Design, produktion og salg af NTG produkter er underlagt løbende kvalitetskontrol i henhold til de strenge inspektionsbestemmelser. Certificering i henhold til EN ISO 9001:2015 for at maksimere kundetilfredsheden.

Fittings opfylder de geometriske, mekaniske, fysiske egenskaber og ydekrav i henhold til EN1553-3, EN 12201-3, AS/NZS 4129, GW 335-B2, samt ISO 4427, ISO 4437 og DIN 16963. Produkterne er Nordic Poly Mark og DK-VAND godkendt.

Fittings med NTG-mærket er godkendt til brug i gas- og vandforsyning. NTG er registreret hos DVGW og er underlagt løbende kvalitetskontrol og regelmæssig ekstern overvågning.

TECHNICAL SPECIFICATIONS FOR THE RAW MATERIAL (HDPE 100-BLACK)

PHYSICAL SPECIFICATIONS / FYSISKE SPEFIKATIONER

Density		g/cm ³	0,959	ISO 1183
Melt flow rate	MFR 190°C / 5KG	g/10min	0,20 - 0,70	ISO 1133

MECHANICAL SPECIFICATIONS

Tensile Modulus	23° CV=1mm / min	MPa	900	ISO 527-2
Tensile Strength at Yield	23° CV=50mm / min	MPa	25	ISO 527-2
Elongation Strength at Break	23° CV=50mm / min	%	>600	ISO 527-2

THERMAL PROPERTIES

Vicat Softening Temperature		°C	128	ISO 306
Thermal Stability	OIT, 210° C	min		ISO 10837

PIGMENT


Carbon Black Content		%	2 - 2,5	ISO 6964
Carbon Black Distribution		Grade	< 3	ISO 18553

NTG PRODUCT CODE

NTG PRODUCT/ Produktkode


Example

PE100 Black SDR11 90° Elbow 110 mm
Code : 001 117 0021 0110

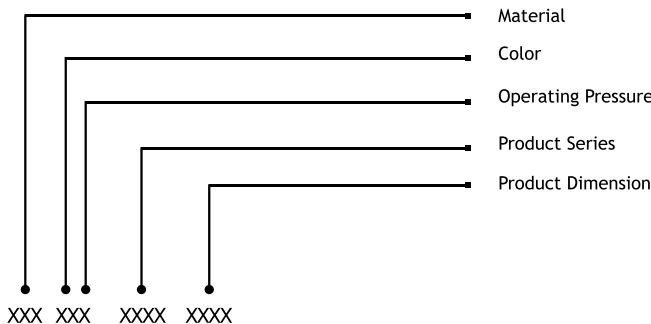

NTG PRODUCT MARKING


NTG PRODUKTMÆRKNING

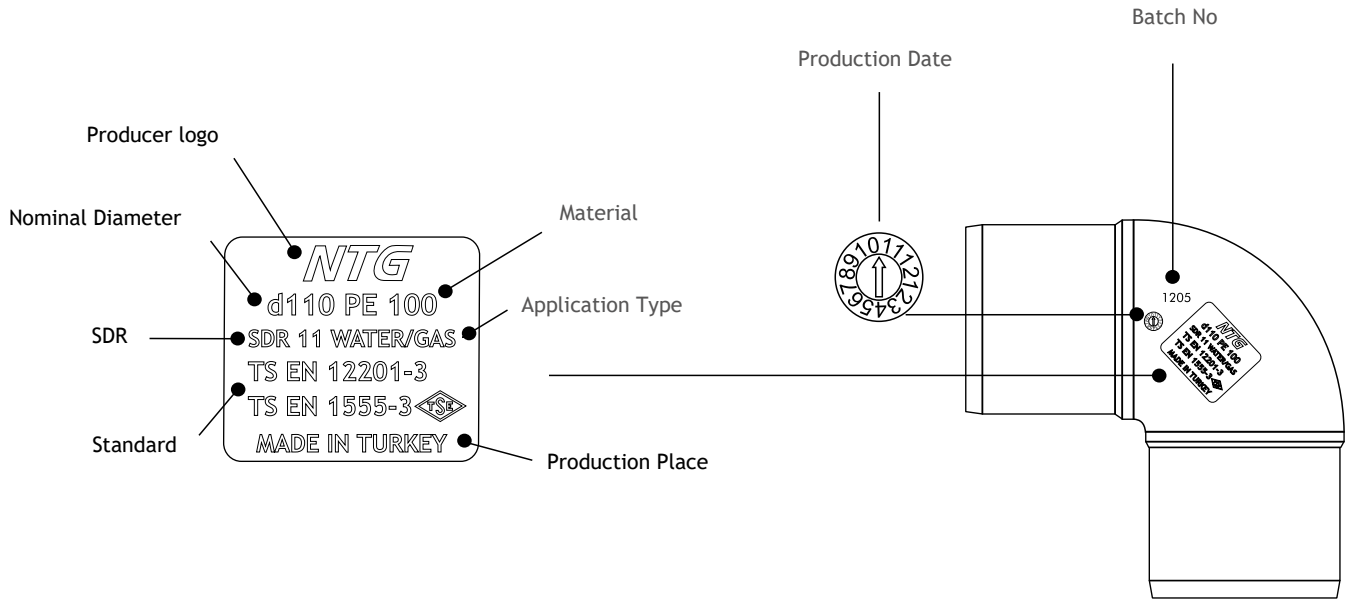

TS EN 12201 - PRESSURE RATINGS OF PE100 PIPE AND FITTINGS

PIPE CLASSIFICATION	OPERATING PRESSURE
SDR 6	PN 32
SDR 7.4	PN 25
SDR 9	PN 20
SDR 11	PN 16
SDR 13.6	PN 12,5
SDR 17	PN 10
SDR 21	PN 8
SDR 26	PN 6
SDR 33	PN 5
SDR 41	PN 4

ELEKTROFUSION BARCODE SYSTEM

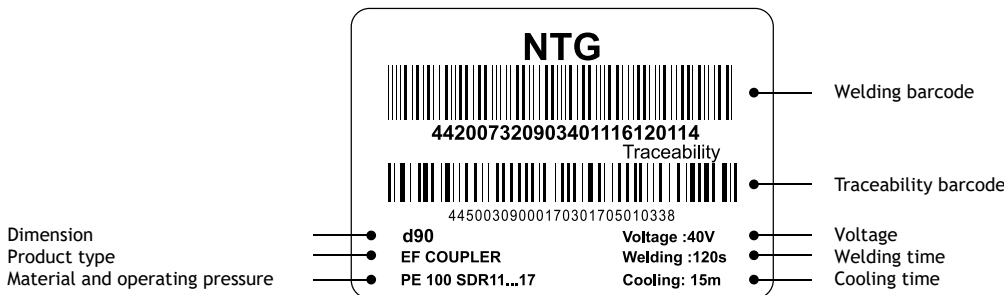

ELBOW 90° PE 100 SDR11


Vinkel 90° PE100 SDR11

•DK-VAND•



Injected / Sprøjttestøbt
Long Spigot / Lang model

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
20		41	63	3,0	0,020	60
25		41	63	3,0	0,030	60
32	07 7801 337	44	72	3,0	0,042	50
40	07 7801 345	49	80	3,7	0,072	42
50	07 7801 355	55	92	4,6	0,132	25
63	07 7801 368	63	111	5,8	0,214	30
75	07 7801 380	70	126	6,8	0,418	30
90	07 7801 395	79	145	8,2	0,654	20
110	07 7801 415	82	161	10,0	1,084	12
125	07 7801 430	87	173	11,4	1,448	12
140	07 7801 445	92	195	12,7	2,152	8
160	07 7801 465	98	205	14,6	2,934	4
180	07 7801 485	105	230	16,4	4,000	4
200	07 7801 505	112	245	18,2	5,892	4
225		120	264	20,5	7,220	2
250		129	292	22,7	10,200	1
280		139	340	25,4	15,442	1
315		150	370	28,6	20,830	1
355		164	401	32,3	30,420	1
400		179	451	36,4	43,330	1

ELBOW 45° PE 100 SDR11


Vinkel 45° PE100 SDR11

•DK-VAND•



Injected / Sprøjttestøbt
Long Spigot / Lang model

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	kg	(pcs/stk)
20		41	70	119	3,0	0,027	60
25		41	73	125	3,0	0,036	50
32	07 7803 337	44	79	136	3,0	0,057	50
40	07 7803 345	49	85	145	3,7	0,099	32
50	07 7803 355	55	89	153	4,6	0,136	62
63	07 7803 368	63	93	160	5,8	0,211	42
75	07 7803 380	70	102	176	6,8	0,329	30
90	07 7803 395	79	118	202	8,2	0,560	24
110	07 7803 415	82	128	220	10,0	0,951	18
125	07 7803 430	87	139	239	11,4	1,290	12
140	07 7803 445	92	145	250	12,7	1,693	12
160	07 7803 465	98	159	273	14,6	2,398	9
180	07 7803 485	105	168	290	16,4	3,233	4
200	07 7803 505	112	179	311	18,2	4,451	4
225		120	198	341	20,5	5,815	2
250		129	213	368	22,7	7,908	2
280		139	235	406	25,4	11,255	1
315		150	249	430	28,6	14,170	1
355		164	284	490	32,3	22,530	1
400		179	317	548	36,4	32,020	1

ELBOW 90° PE 100 SDR17


Vinkel 90° PE100 SDR17

•DK-VAND•



Injected / Sprøjttestøbt
Long Spigot / Lang model

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
63	07 7701 368	63	111	3,8	0,215	30
75	07 7701 380	70	126	4,5	0,312	30
90	07 7701 395	79	145	5,4	0,472	20
110	07 7701 415	82	161	6,6	0,768	12
125	07 7701 430	87	173	7,4	1,040	12
140	07 7701 445	92	195	8,3	1,488	8
160	07 7701 465	98	205	9,5	2,218	4
180	07 7701 485	105	230	10,7	2,864	4
200	07 7701 505	112	245	11,9	4,362	4
225	07 7701 530	120	264	13,4	5,168	2
250	07 7701 555	129	292	14,8	7,476	1
280	07 7701 585	139	340	16,6	11,430	1
315	07 7701 620	150	370	18,7	15,684	1
355	07 7701 660	164	401	21,1	21,100	1
400	07 7701 705	179	451	23,7	30,450	1

ELBOW 45° PE 100 SDR17


Vinkel 45° PE100 SDR17

•DK-VAND•



Injected / Sprøjttestøbt
Long Spigot / Lang model

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	kg	(pcs/stk)
63	07 7703 368	63	93	160	3,8	0,164	42
75	07 7703 380	70	102	176	4,5	0,239	30
90	07 7703 395	79	118	202	5,4	0,410	24
110	07 7703 415	82	128	220	6,6	0,689	18
125	07 7703 430	87	139	239	7,4	0,906	12
140	07 7703 445	92	145	250	8,3	1,201	12
160	07 7703 645	98	159	273	9,5	1,764	9
180	07 7703 485	105	168	290	10,7	2,283	4
200	07 7703 505	112	179	311	11,9	3,276	4
225	07 7703 530	120	198	341	13,4	4,215	2
250	07 7703 555	129	213	368	14,8	5,908	2
280	07 7703 585	139	235	406	16,6	8,055	1
315	07 7703 620	150	249	430	18,7	10,270	1
355	07 7703 660	164	284	490	21,1	15,470	1
400	07 7703 705	179	317	548	23,7	21,920	1

ELBOW 11° PE 100 SDR11

Vinkel 11° PE100 SDR11


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7848 395	79	200	8,2	0,415	24
110	07 7848 415	82	209	10,0	0,700	18
125	07 7848 430	87	222	11,4	0,919	12
140	07 7848 445	92	237	12,7	1,214	12
160	07 7848 465	98	251	14,6	1,697	9
180	07 7848 485	105	268	16,4	2,374	4
200	07 7848 505	112	284	18,2	3,036	4
225		120	310	20,5	4,554	2
250		129	337	22,7	6,044	2
280		139	370	25,4	8,901	1
315		150	412	28,6	11,951	1
355		164	446	32,3	15,911	1
400		179	476	36,4	21,583	1



ELBOW 22° PE 100 SDR11

Vinkel 22° PE100 SDR11


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7847 395	79	208	8,2	0,455	24
110	07 7847 415	82	217	10,0	0,734	18
125	07 7847 530	87	231	11,4	1,007	12
140	07 7847 445	92	247	12,7	1,339	12
160	07 7847 465	98	263	14,6	1,973	9
180	07 7847 485	105	279	16,4	2,622	4
200	07 7847 505	112	296	18,2	3,298	4
225		120	323	20,5	5,051	2
250		129	353	22,7	6,679	2
280		139	385	25,4	9,798	1
315		150	435	28,6	13,331	1
355		164	463	32,3	17,360	1
400		179	501	36,4	23,557	1



ELBOW 11° PE 100 SDR17

Vinkel 11° PE100 SDR17


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7748 395	79	200	5,4	0,301	24
110	07 7748 415	82	209	6,6	0,507	18
125	07 7748 430	87	222	7,4	0,666	12
140	07 7748 445	92	237	8,3	0,880	12
160	07 7748 465	98	251	9,5	1,230	9
180	07 7748 485	105	268	10,7	1,720	4
200	07 7748 505	112	284	11,9	2,200	4
225	07 7748 530	120	310	13,4	3,300	2
250	07 7748 555	129	337	14,8	4,380	2
280	07 7748 585	139	370	16,6	6,450	1
315	07 7748 620	150	412	18,7	8,660	1
355	07 7748 660	164	446	21,1	11,530	1
400	07 7748 705	179	476	23,7	15,640	1



ELBOW 22° PE 100 SDR17

Vinkel 22° PE100 SDR17


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7747 395	79	208	5,4	0,330	24
110	07 7747 415	82	217	6,6	0,532	18
125	07 7747 430	87	231	7,4	0,730	12
140	07 7747 445	92	247	8,3	0,970	12
160	07 7747 465	98	263	9,5	1,430	9
180	07 7747 485	105	279	10,7	1,900	4
200	07 7747 505	112	296	11,9	2,390	4
225	07 7747 530	120	323	13,4	3,660	2
250	07 7747 555	129	353	14,8	4,840	2
280	07 7747 585	139	385	16,6	7,100	1
315	07 7747 620	150	435	18,7	9,660	1
355	07 7747 660	164	463	21,1	12,580	1
400	07 7747 705	179	501	23,7	17,070	1



ELBOW 30° PE 100 SDR11

Vinkel 30° PE100 SDR11


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

10 bar Gas 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7804 395	79	224	8,2	0,542	24
110	07 7804 415	82	243	10,0	1,105	18
125	07 7804 430	87	261	11,4	1,500	12
140	07 7804 445	92	278	12,7	1,946	12
160	07 7804 465	98	298	14,6	2,506	9
180	07 7804 485	105	317	16,4	3,516	4
200	07 7804 505	112	345	18,2	4,560	4
225		120	373	20,5	6,362	2
250		129	405	22,7	8,156	2
280		139	444	25,4	11,799	1
315		150	478	28,6	16,174	1
355		164	475	32,3	18,796	1
400		179	522	36,4	25,972	1



ELBOW 30° PE 100 SDR17

Vinkel 30° PE100 SDR17


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

5 bar Gas 10 bar Water / 5 bar Gas - 10 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7704 395	79	224	5,4	0,393	24
110	07 7704 415	82	243	6,6	0,801	18
125	07 7704 430	87	261	7,4	1,087	12
140	07 7704 445	92	278	8,3	1,410	12
160	07 7704 465	98	298	9,5	1,816	9
180	07 7704 485	105	317	10,7	2,548	4
200	07 7704 505	112	345	11,9	3,304	4
225	07 7704 530	120	373	13,4	4,610	2
250	07 7704 555	129	405	14,8	5,910	2
280	07 7704 585	139	444	16,6	8,550	1
315	07 7704 620	150	478	18,7	11,720	1
355	07 7704 660	164	475	21,1	13,620	1
400	07 7704 705	179	522	23,7	18,820	1



ELBOW 60° PE 100 SDR11

Vinkel 60° PE100 SDR11


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

10 bar Gas 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7802 395	79	185	8,2	0,543	24
110	07 7802 415	82	201	10,0	0,913	18
125	07 7802 430	87	220	11,4	1,200	12
140	07 7802 445	92	232	12,7	1,591	12
160	07 7802 465	98	252	14,6	2,159	9
180	07 7802 485	105	271	16,4	3,025	4
200	07 7802 505	112	291	18,2	4,340	4
225		120	320	20,5	5,584	2
250		129	351	22,7	7,827	2
280		139	390	25,4	10,671	1
315		150	416	28,6	14,705	1
355		164	472	32,3	29,848	1
400		179	525	36,4	42,420	1



ELBOW 60° PE 100 SDR17

Vinkel 60° PE100 SDR17


•DK-VAND•



Long Spigot / Lang model
Welded Design / Svejst

5 bar Gas 10 bar Water / 5 bar Gas - 10 bar Vand

d	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
90	07 7702 395	79	185	5,4	0,394	24
110	07 7702 415	82	201	6,6	0,661	18
125	07 7702 430	87	220	7,4	0,870	12
140	07 7702 445	92	232	8,3	1,153	12
160	07 7702 465	98	252	9,5	1,565	9
180	07 7702 485	105	271	10,7	2,192	4
200	07 7702 505	112	291	11,9	3,145	4
225	07 7702 530	120	320	13,4	4,046	2
250	07 7702 555	129	351	14,8	5,672	2
280	07 7702 585	139	390	16,6	7,733	1
315	07 7702 620	150	416	18,7	10,656	1
355	07 7702 660	164	472	21,1	21,629	1
400	07 7702 705	179	525	23,7	30,739	1




TEE 90°, EQUAL PE 100 SDR11

Tee 90° PE100 SDR11

Injected / Sprøjttestøbt
Long Spigot / Lang model



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	L	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	kg	(pcs/stk)
20		148	41	74	3,0	0,038	50
25		158	41	78	3,0	0,054	40
32	07 7811 337	166	44	84	3,0	0,074	30
40	07 7811 345	188	49	96	3,7	0,134	50
50	07 7811 355	229	55	114	4,6	0,242	47
63	07 7811 368	216	63	107	5,8	0,384	36
75	07 7811 380	261	70	130	6,8	0,560	22
90	07 7811 395	290	79	142	8,2	0,892	14
110	07 7811 415	327	82	162	10,0	1,580	14
125	07 7811 430	356	87	178	11,4	2,204	8
140	07 7811 445	380	92	189	12,7	2,751	6
160	07 7811 465	417	98	208	14,6	4,130	4
180	07 7811 485	458	105	225	16,4	5,658	3
200	07 7811 505	481	112	236	18,2	7,490	2
225		527	120	260	20,5	10,126	2
250		590	129	292	22,7	13,768	2
280		690	139	340	25,4	21,564	1
315		712	150	352	28,6	27,066	1
355		789	164	394	32,3	36,830	1
400		877	179	439	36,4	55,760	1


TEE 90°, EQUAL PE 100 SDR17

Tee 90° PE100 SDR17

Injected / Sprøjttestøbt
Long Spigot / Lang model



5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	L	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	kg	(pcs/stk)
63	07 7711 368	225	63	114	3,8	0,310	36
75	07 7711 380	261	70	130	4,5	0,434	22
90	07 7711 395	290	79	142	5,4	0,676	14
110	07 7711 415	327	82	162	6,6	1,232	14
125	07 7711 430	356	87	178	7,4	1,626	8
140	07 7711 445	378	92	189	8,3	2,028	6
160	07 7711 465	417	98	208	9,5	3,076	4
180	07 7711 485	458	105	225	10,7	4,140	3
200	07 7711 505	481	112	236	11,9	5,222	2
225	07 7711 530	527	120	260	13,4	7,350	2
250	07 7711 555	590	129	292	14,8	9,858	2
280	07 7711 585	690	139	340	16,6	15,856	1
315	07 7711 620	712	150	352	18,7	19,200	1
355	07 7711 660	789	164	394	21,1	27,280	1
400	07 7711 705	877	179	439	23,7	38,250	1


WYE TEE 45° PE 100 SDR11

Tee 45° PE100 SDR11

Injected / Sprøjttestøbt
Long Spigot / Lang model



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	L	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	kg	(pcs/stk)
63	07 7861 368	254	63	164	5,8	0,474	22
75	07 7861 380	284	70	185	6,8	0,693	20
90	07 7861 395	321	79	213	8,2	1,150	11
110	07 7861 415	376	82	251	10,0	1,964	9
125	07 7861 430	412	87	277	11,4	2,860	5
160	07 7861 465	531	98	356	14,6	6,350	30
180	07 7861 485	578	105	394	16,4	8,590	20
200	07 7861 505	630	112	430	18,2	11,350	13
225		692	120	475	20,5	15,790	10
250		729	129	507	22,7	20,130	8


WYE TEE 45° PE 100 SDR17

Tee 45° PE100 SDR17

Injected / Sprøjttestøbt
Long Spigot / Lang model



5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	L	le	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	kg	(pcs/stk)
63	07 7761 368	254	63	164	3,8	0,342	22
75	07 7761 380	284	70	185	4,5	0,502	20
90	07 7761 395	321	79	213	5,4	0,840	11
110	07 7761 415	376	82	251	6,6	1,433	9
125	07 7761 430	412	87	277	7,4	2,125	5
160	07 7761 465	531	98	356	9,5	4,700	30
180	07 7761 485	578	105	394	10,7	6,470	20
200	07 7761 505	630	112	430	11,9	8,580	13
225	07 7761 530	692	120	475	13,4	11,920	10
250		729	129	507	14,8	14,840	8

TEE 90°, REDUCED PE 100 SDR11

Tee reduceret 90° PE100 SDR11

Injected / Sprøjttestøbt


Long Spigot / Lang model

* Welded Design / Svejst




DK-VAND

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

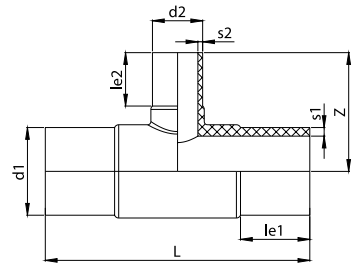

d1	d2	Article No VVS nr	L	le1	le2	Z	s1	s2	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
50	40	07 7812 355	229	55	49	94	4,6	3,7	0,210	32
50	32	07 7813 355	229	55	44	88	4,6	3,0	0,192	32
50	25		229	55	41	85	4,6	3,0	0,180	32
63	50	07 7812 368	216	63	55	103	5,8	4,6	0,346	36
63	40	07 7813 368	216	63	49	95	5,8	3,7	0,312	36
63	32	07 7814 368	216	63	44	89	5,8	3,0	0,304	36
75	63	07 7812 380	261	70	63	121	6,8	5,8	0,522	22
75	50	07 7813 380	261	70	55	113	6,8	4,6	0,480	22
75	40	07 7814 380	261	70	49	106	6,8	3,7	0,454	22
75	32	07 7815 380	260	70	44	100	6,8	3,0	0,450	22
90	75	07 7812 395	290	79	70	136	8,2	6,8	0,834	14
90	63	07 7813 395	290	79	63	132	8,2	5,8	0,790	14
90	50	07 7814 395	290	79	55	124	8,2	4,6	0,748	14
110	90	07 7812 415	327	82	79	157	10,0	8,2	1,422	14
110	75	07 7813 415	327	82	70	151	10,0	6,8	1,356	14
110	63	07 7814 415	327	82	63	149	10,0	5,8	1,318	14
110	50	07 7815 415	327	82	55	147	10,0	4,6	1,282	14
110	32	07 7817 415	327	82	55	140	10,0	3,0	1,232	14
125	110	07 7812 430	356	87	82	176	11,4	10,0	2,082	8
125	90	07 7813 430	356	87	79	172	11,4	8,2	2,000	8
125	63		356	87	63	154	11,4	5,8	1,740	8
140	125	07 7812 445	380	92	87	184	12,7	11,4	2,612	6
140	110	07 7813 445	380	92	82	179	12,7	10,0	2,542	6
140	90	07 7814 445	380	92	79	175	12,7	8,2	2,414	6
160	140	07 7812 465	417	98	92	200	14,6	12,7	3,838	4
160	125	07 7813 465	417	98	87	200	14,6	11,4	3,754	4
160	110	07 7814 465	417	98	82	195	14,6	10,0	3,660	4
160	90	07 7815 465	417	98	79	187	14,6	8,2	3,334	5
160	75	07 7816 465	417	98	70	182	14,6	6,8	3,428	5
160	63	07 7817 465	417	98	63	175	14,6	5,8	3,430	5
180	160	07 7812 485	458	105	98	222	16,4	14,6	5,346	3
180	125	07 7814 485	458	105	87	215	16,4	11,4	5,086	3
180	110	07 7815 485	458	105	82	210	16,4	10,0	4,950	3
180	90	07 7816 485	458	105	79	206	16,4	8,2	4,818	3
200	160	07 7813 505	481	112	98	227	18,2	14,6	6,820	3
200	125	07 7815 505	481	112	87	225	18,2	11,4	6,464	3
200	110	07 7816 505	481	112	82	211	18,2	10,0	6,324	3
200	90	07 7817 505	481	112	79	207	18,2	8,2	6,200	3
200	63	07 7819 505	481	112	63	191	18,2	5,8	6,170	3
225	160		527	120	98	242	20,5	14,6	9,120	2
225	125		527	120	87	239	20,5	11,4	8,930	2
225	110		527	120	82	226	20,5	10,0	8,750	2
225	90		527	120	79	222	20,5	8,2	8,728	2
250	225		590	129	120	285	22,7	20,5	13,264	2
250	200		590	129	112	278	22,7	18,2	12,607	2
250	160		590	129	98	267	22,7	14,6	11,950	2
250	125		590	129	87	252	22,7	11,4	11,630	2
250	110		590	129	82	251	22,7	10,0	11,690	2
250	90		590	129	79	243	22,7	8,2	11,428	2
280	250		685	139	129	331	25,4	22,7	20,175	1
280	225		690	139	120	320	25,4	20,5	19,700	1
280	200		690	139	112	316	25,4	18,2	18,932	1
280	160		690	139	98	302	25,4	14,6	18,186	1
280	110		690	139	82	290	25,4	10,0	17,890	1
315	250		712	150	129	332	28,6	22,7	25,420	1
315	225		712	150	120	325	28,6	20,5	24,920	1
315	200		712	150	112	317	28,6	18,2	24,300	1
315	160		712	150	98	303	28,6	14,6	23,860	1
315	110		712	150	82	293	28,6	10,0	22,746	1
* 355	315		789	164	150	594	32,3	28,6	42,100	1
* 355	250		789	164	129	796	32,3	22,7	45,610	1
* 355	225		789	164	120	796	32,3	18,2	45,000	1
* 400	315		877	179	150	630	36,4	28,6	56,830	1
* 400	250		877	179	129	833	36,4	22,7	60,400	1
* 400	225		877	179	120	833	36,4	18,2	59,820	1

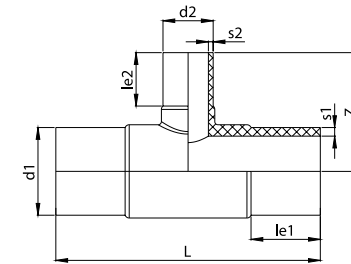

TEE 90°, REDUCED PE 100 SDR17

Tee reduceret 90° PE100 SDR17

Injected / Sprøjttestøbt

Long Spigot / Lang model

* Welded Design / Svejst



DK-VAND

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand

d1	d2	Article No VVS nr	L	le1	le2	Z	s1	s2	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
75	63	07 7712 380	261	70	63	121	4,5	3,8	0,382	22
90	75	07 7712 395	290	79	70	136	5,4	4,5	0,612	14
90	63	07 7713 395	290	79	63	132	5,4	3,8	0,614	14
110	90	07 7712 415	327	82	79	157	6,6	5,4	1,100	14
110	75	07 7713 415	327	82	70	151	6,6	4,5	1,034	14
110	63	07 7714 415	327	82	63	149	6,6	3,8	1,020	14
125	110	07 7712 430	356	87	82	176	7,4	6,6	1,522	8
125	90	07 7713 430	356	87	79	172	7,4	5,4	1,420	8
125	63		356	87	63	154	7,4	3,8	1,260	8
140	125	07 7712 445	380	92	87	184	8,3	7,4	1,826	6
140	110	07 7713 445	380	92	82	179	8,3	6,6	1,816	6
140	90	07 7714 445	380	92	79	175	8,3	5,4	1,700	6
160	140	07 7712 465	417	98	92	200	9,5	8,3	2,900	4
160	125	07 7713 465	417	98	87	200	9,5	7,4	2,742	4
160	110	07 7714 465	417	98	82	195	9,5	6,6	2,714	4
160	90	07 7715 465	417	98	79	187	9,5	5,4	2,642	5
160	75	07 7716 465	417	98	70	182	9,5	4,5	2,590	5
160	63	07 7717 465	417	98	63	175	9,5	3,8	2,536	5
180	160	07 7712 485	458	105	98	226	10,7	9,5	3,858	3
180	125	07 7714 485	458	105	87	215	10,7	7,4	3,682	3
180	110	07 7715 485	458	105	82	210	10,7	6,6	3,612	3
180	90	07 7716 485	458	105	79	206	10,7	5,4	3,540	3
200	160	07 7713 505	481	112	98	227	11,9	9,5	4,854	3
200	125	07 7715 505	481	112	87	225	11,9	7,4	4,686	3
200	110	07 7716 505	481	112	82	211	11,9	6,6	4,545	3
200	90	07 7717 505	481	112	79	207	11,9	5,4	4,426	3
200	63	07 7719 505	481	112	63	191	11,9	3,8	4,427	3
225	160	07 7714 530	527	120	98	242	13,4	9,5	6,652	2
225	125	07 7716 530	527	120	87	239	13,4	7,4	6,400	2
225	110	07 7717 530	527	120	82	226	13,4	6,6	6,344	2
225	90	07 7718 530	527	120	79	222	13,4	5,4	6,270	2
250	225	07 7712 555	590	129	120	285	14,8	13,4	9,494	2
250	200	07 7713 555	590	129	112	278	14,8	11,9	9,109	2
250	160	07 7715 555	590	129	98	267	14,8	9,5	8,724	2
250	125	07 7717 555	590	129	87	252	14,8	7,4	8,500	2
250	110	07 7718 555	590	129	82	251	14,8	6,6	8,382	2
250	90	07 7719 555	590	129	79	243	14,8	5,4	8,550	2
280	250	07 7712 585	690	139	129	334	16,6	14,8	14,478	1
280	225	07 7713 585	690	139	120	320	16,6	13,4	14,160	1
280	200	07 7714 585	690	139	112	316	16,6	11,9	13,950	1
280	160	07 7716 585	690	139	98	302	16,6	9,5	13,650	1
280	110	07 7719 585	690	139	82	290	16,6	6,6	13,330	1
315	250	07 7713 620	712	150	129	332	18,7	14,8	17,640	1
315	225	07 7714 620	712	150	120	320	18,7	13,4	17,000	1
315	200	07 7715 620	712	150	112	317	18,7	11,9	16,750	1
315	160	07 7717 620	712	150	98	303	18,7	9,5	16,430	1
315	110	07 7720 620	712	150	82	293	18,7	6,6	16,234	1
* 355	315		789	164	150	594	21,1	18,7	30,270	1
* 355	250		789	164	129	796	21,1	14,8	33,220	1
* 355	225		789	164	120	796	21,1	13,4	33,010	1
* 400	315		877	179	150	630	23,7	18,7	40,930	1
* 400	250		877	179	129	833	23,7	14,8	43,850	1
* 400	225		877	179	120	833	23,7	13,4	43,640	1

REDUCER PE 100 SDR11


Reduktion PE100 SDR11

Injected / Sprøjttestøbt - Long Spigot / Lang model



DK-VAND

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

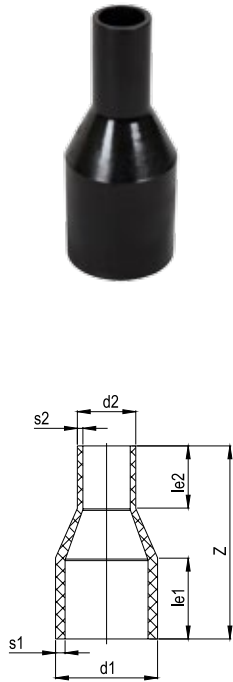

d1	d2	Article No VVS nr	Z	le1	le2	s1	s2	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	kg	(pcs/stk)
25	20		120	41	41	3,0	3,0	0,024	80
32	25		130	44	41	3,0	3,0	0,034	50
32	20		115	44	41	3,0	3,0	0,030	50
40	32	07 7824 345	130	49	44	3,7	3,0	0,052	50
40	25		130	49	41	3,7	3,0	0,042	50
50	40	07 7824 355	140	55	49	4,6	3,7	0,078	40
50	32	07 7825 355	140	55	44	4,6	3,0	0,074	40
50	25		140	55	41	4,6	3,0	0,068	40
63	50	07 7824 368	150	63	55	5,8	4,6	0,140	20
63	40	07 7825 368	150	63	49	5,8	3,7	0,116	20
63	32	07 7826 368	150	63	44	5,8	3,0	0,112	20
63	25		143	63	41	5,8	3,0	0,106	20
75	63	07 7824 380	175	70	63	6,8	5,8	0,232	36
75	50	07 7825 380	175	70	55	6,8	4,6	0,194	36
75	40	07 7826 380	170	70	49	6,8	3,7	0,166	36
75	32	07 7827 380	170	70	44	6,8	3,0	0,164	36
90	75	07 7824 395	200	79	70	8,2	6,8	0,390	36
90	63	07 7825 395	196	79	63	8,2	5,8	0,302	36
90	50	07 7826 395	190	79	55	8,2	4,6	0,288	36
110	90	07 7824 415	213	82	79	10,0	8,2	0,586	30
110	75	07 7825 415	216	82	70	10,0	6,8	0,546	30
110	63	07 7826 415	214	82	63	10,0	5,8	0,496	30
110	50	07 7827 415	208	82	55	10,0	4,6	0,410	30
125	110	07 7824 430	222	87	82	11,4	10,0	0,844	18
125	90	07 7825 430	222	87	79	11,4	8,2	0,729	24
125	75	07 7826 430	215	87	70	11,4	6,8	0,642	24
125	63	07 7827 430	195	87	63	11,4	5,8	0,602	24
140	125	07 7824 445	225	92	87	12,7	11,4	1,090	16
140	110	07 7825 445	233	92	82	12,7	10,0	1,002	16
140	90	07 7826 445	225	92	79	12,7	8,2	0,824	16
140	75	07 7827 445	225	92	70	12,7	6,8	0,826	16
160	140	07 7824 465	245	98	92	14,6	12,7	1,468	16
160	125	07 7825 465	250	98	87	14,6	11,4	1,442	16
160	110	07 7826 465	250	98	82	14,6	10,0	1,280	16
160	90	07 7827 465	245	98	79	14,6	8,2	1,220	16
180	160	07 7824 485	255	105	98	16,4	14,6	2,068	6
180	140	07 7825 485	250	105	92	16,4	12,7	1,800	6
180	125	07 7826 485	255	105	87	16,4	11,4	1,646	6
180	110	07 7827 485	255	105	82	16,4	10,0	1,588	6
200	180	07 7824 505	275	112	105	18,2	16,4	2,654	8
200	160	07 7825 505	270	112	98	18,2	14,6	2,364	8
200	140	07 7826 505	275	112	92	18,2	12,7	2,342	8
200	110	07 7828 505	275	112	82	18,2	10,0	2,192	8
225	200		300	120	112	20,5	18,2	3,758	5
225	180		280	120	105	20,5	16,4	3,336	5
225	160		280	120	98	20,5	14,6	3,024	5
225	110		295	120	82	20,5	10,0	2,848	6
250	225		305	129	120	22,7	20,5	4,708	2
250	200		310	129	112	22,7	18,2	4,346	2
250	180		305	129	105	22,7	16,4	4,208	2
250	160		294	129	98	22,7	14,6	3,542	2
280	250		348	139	129	25,4	22,7	6,818	2
280	225		336	139	120	25,4	20,5	6,050	2
280	200		348	139	112	25,4	18,2	5,758	2
280	180		348	139	105	25,4	16,4	5,390	2
315	280		355	150	139	28,6	25,4	8,678	2
315	250		375	150	129	28,6	22,7	8,066	2
315	225		375	150	120	28,6	20,5	7,652	2
355	315		390	164	150	32,3	28,6	11,290	1
400	315		430	179	150	36,4	28,6	14,560	1

REDUCER PE 100 SDR17


Reduktion PE100 SDR17

Injected / Sprøjttestøbt - Long Spigot / Lang model



DK-VAND

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand

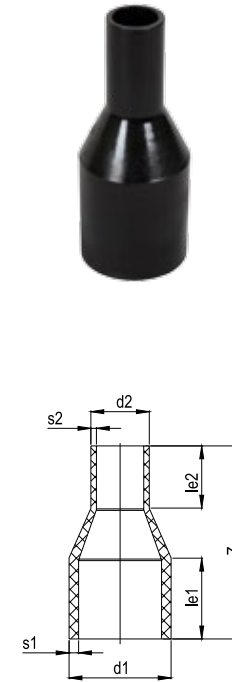

d1	d2	Article No VVS nr	Z	le1	le2	s1	s2	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	kg	(pcs/stk)
75	63	07 7724 380	175	70	63	4,5	3,8	0,199	36
90	75	07 7724 395	200	79	70	5,4	4,5	0,330	36
90	63	07 7725 395	196	79	63	5,4	3,8	0,258	36
110	90	07 7724 415	213	82	79	6,6	5,4	0,498	30
110	75	07 7725 415	216	82	70	6,6	4,5	0,463	30
110	63	07 7726 415	214	82	63	6,6	3,8	0,421	30
125	110	07 7724 430	222	87	82	7,4	6,6	0,717	18
125	90	07 7725 430	222	87	79	7,4	5,4	0,619	24
125	75	07 7726 430	215	87	70	7,4	4,5	0,545	24
125	63	07 7727 430	195	87	63	7,4	3,8	0,511	24
140	125	07 7724 445	225	92	87	8,3	7,4	0,926	16
140	110	07 7725 445	233	92	82	8,3	6,6	0,851	16
140	90	07 7726 445	225	92	79	8,3	5,4	0,700	16
140	75	07 7727 445	225	92	70	8,3	4,5	0,702	16
160	140	07 7724 465	245	98	92	9,5	8,3	1,247	16
160	125	07 7725 465	250	98	87	9,5	7,4	1,225	16
160	110	07 7726 465	250	98	82	9,5	6,6	1,088	16
160	90	07 7727 465	245	98	79	9,5	5,4	1,038	16
180	160	07 7724 485	255	105	98	10,7	9,5	1,757	6
180	140	07 7725 485	250	105	92	10,7	8,3	1,530	6
180	125	07 7726 485	255	105	87	10,7	7,4	1,414	6
180	110	07 7727 485	255	105	82	10,7	6,6	1,350	6
200	180	07 7724 505	275	112	105	11,9	10,7	2,255	8
200	160	07 7725 505	270	112	98	11,9	9,5	2,009	8
200	140	07 7726 505	275	112	92	11,9	8,3	1,990	8
200	110	07 7728 505	275	112	82	11,9	6,6	1,863	8
225	200	07 7724 530	300	120	112	13,4	11,9	3,194	5
225	180	07 7725 530	280	120	105	13,4	10,7	2,835	5
225	160	07 7726 530	280	120	98	13,4	9,5	2,570	5
225	110	07 7729 530	295	120	82	13,4	6,6	2,420	6
250	225	07 7724 555	305	129	120	14,8	13,4	3,995	2
250	200	07 7725 555	310	129	112	14,8	11,9	3,694	2
250	180	07 7726 555	305	129	105	14,8	10,7	3,576	2
250	160	07 7727 555	294	129	98	14,8	9,5	3,017	2
280	250	07 7724 585	348	139	129	16,6	14,8	5,795	2
280	225	07 7725 585	336	139	120	16,6	13,4	5,142	2
280	200	07 7726 585	348	139	112	16,6	11,9	4,894	2
280	180	07 7727 585	348	139	105	16,6	10,7	4,589	2
315	280	07 7724 620	355	150	139	18,7	16,6	7,383	2
315	250	07 7725 620	375	150	129	18,7	14,8	6,856	2
315	225	07 7726 620	375	150	120	18,7	13,4	6,504	2
355	315		390	164	150	21,1	18,7	8,090	1
400	315	07 7725 705	430	179	150	23,7	18,7	12,376	1

STEP REDUCER PE 100 SDR11


Step reduktion PE100 SDR11

•DK-VAND•



Injected / Sprøjttestøbt
Short Spigot / Kort model

16 bar Water / 16 bar Vand

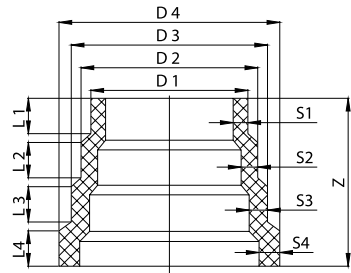

D4	D1	Article No VVS nr	D2	D3	L1	L2	L3	L4	Z
mm	mm		mm	mm	mm	mm	mm	mm	mm
225	160		180	200	36	36	36	36	171.0
315	225		250	280	36	36	36	36	171.0
450	315		355	400	36	36	36	52	176.0
630	450		500	560	36	36	36	72	200.0

D4	D1	Article No VVS nr	D2	D3	S1	S2	S3	S4	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
225	160		180	200	14.6	16.4	18.2	20.5		1
315	225		250	280	20.5	22.7	25.4	28.6	3,7	1
450	315		355	400	28.6	32.3	36.4	40.9	8,3	1
630	450		500	560	40.9	45.5	50.8	57.2	19,7	1

STEP REDUCER PE 100 SDR17


Step reduktion PE100 SDR17

•DK-VAND•



Injected / Sprøjttestøbt
Short Spigot / Kort model

10 bar Water / 10 bar Vand

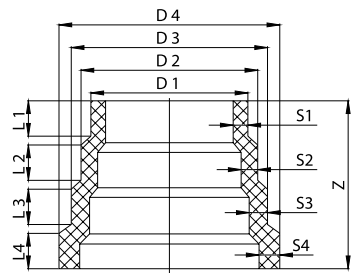

D4	D1	Article No VVS nr	D2	D3	L1	L2	L3	L4	z
mm	mm		mm	mm	mm	mm	mm	mm	mm
225	160		180	200	36	36	36	36	171,0
315	225		250	280	36	36	36	36	171,0
450	315		355	400	36	36	36	52	180,0
630	450		500	560	36	36	36	72	208,0
900	630		710	800	36	36	36	86	194,0

D4	D1	Article No VVS nr	D2	D3	S1	S2	S3	S4	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
225	160		180	200	9,5	10,7	11,9	13,4	1,3	1
315	225		250	280	13,4	14,8	16,6	18,7	2,5	1
450	315		355	400	18,7	21,1	23,7	26,7	5,8	1
630	450		500	560	26,7	29,7	33,2	37,4	14,0	1
900	630		710	800	37,4	42,1	47,4	53,3	31,0	1

END CAP PE 100 SDR11


Slutmuffe PE100 SDR11



•DK-VAND•

Injected / Sprøjttestøbt
Long Spigot / Lang model

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	le	s	Weight Vægt	Box Kasse
mm		mm	mm	kg	(pcs/stk)
20		41	3,0	0,008	100
25		41	3,0	0,012	100
32	07 7878 337	44	3,0	0,016	100
40	07 7878 345	49	3,7	0,028	60
50	07 7878 355	55	4,6	0,048	50
63	07 7878 368	63	5,8	0,088	36
75	07 7878 380	70	6,8	0,142	27
90	07 7878 395	79	8,2	0,234	60
110	07 7878 415	82	10,0	0,374	36
125	07 7878 430	87	11,4	0,542	24
140	07 7878 445	92	12,7	0,748	22
160	07 7878 465	98	14,6	1,022	15
180	07 7878 485	105	16,4	1,416	8
200	07 7878 505	112	18,2	1,888	10
225		120	20,5	2,520	4
250		129	22,7	3,240	4
280		139	25,4	4,580	3
315		150	28,6	6,310	2
355		164	32,3	8,700	1
400		179	36,4	12,440	1

END CAP PE 100 SDR17


Slutmuffe PE100 SDR17



•DK-VAND•

Injected / Sprøjttestøbt
Long Spigot / Lang model

5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	le	s	Weight Vægt	Box Kasse
mm		mm	mm	kg	(pcs/stk)
63	07 7778 368	63	3,8	0,079	36
75	07 7778 380	70	4,5	0,117	27
90	07 7778 395	79	5,4	0,205	60
110	07 7778 415	82	6,6	0,308	36
125	07 7778 430	87	7,4	0,436	24
140	07 7778 445	92	8,3	0,621	22
160	07 7778 465	98	9,5	0,863	15
180	07 7778 485	105	10,7	1,135	8
200	07 7778 505	112	11,9	1,518	10
225	07 7778 530	120	13,4	2,113	4
250	07 7778 555	129	14,8	2,764	4
280	07 7778 585	139	16,6	3,761	3
315	07 7778 620	150	18,7	5,191	2
355	07 7778 660	164	21,1	7,465	1
400	07 7778 705	179	23,7	10,640	1

FLANGE ADAPTOR PE 100 SDR11

Flange adapter PE100 SDR11



Injected / Sprøjtetøbt

Long Spigot / Lang model


*Not suitable for ANSI flange. Please check page 25 for suitable flanges /

Passer ikke for ANSI flange. Se side 25 for flanger

**With welded pipes / Påsvejst rør



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
20		28	45		55	7	80	3,0	0,024	100
*25		34	58		62	9	81	3,0	0,038	50
*32	07 7851 337	42	68		61	10	86	3,0	0,052	40
*40	07 7851 345	51	78		60	11	88	3,7	0,082	70
*50	07 7851 355	62	88		63	12	92	4,6	0,122	50
*63	07 7851 368	78	102		88	14	120	5,8	0,200	60
*75	07 7851 380	92	122		97	16	130	6,8	0,310	60
*90	07 7851 395	108	138		103	17	140	8,2	0,440	45
110	07 7851 415	125	158		113	18	155	10,0	0,680	24
125	07 7851 430	135	158		120	20	159	11,4	0,780	16
140	07 7851 445	155	188		128	25	190	12,7	1,318	12
160	07 7851 465	175	212	154	155	25	200	14,6	1,620	12
180	07 7851 485	188	212	158	152	30	207	16,4	1,960	10
200	07 7851 505	232	268	208	153	32	210	18,2	2,680	4
225		238	268	208	139	32	196	20,5	3,108	4
250		288	320	260	140	35	205	22,7	3,782	2
280		288	320	260	145	35	211	25,4	4,724	2
315		338	375	305	160	35	224	28,6	6,346	2
355		376	435	345	172	45	240	32,3	9,188	1
400		430	485	396	181	50	264	36,4	12,700	1
**450(DN450)		465	545	442	195	66	360	40,9	21,770	1
**450(DN500)		517	585	480	195	65	360	40,9	22,890	1
**500		530	590	494	212	60	354	45,5	25,060	1
*/**/**560		618	690	580	235	80	423	50,8	38,800	1
*/**630		645	690	576	255	65	404	57,3	42,400	1
**710		740	800	663	282	75	447	64,5	61,198	1

FLANGE ADAPTOR PE 100 SDR17

Flange adapter PE100 SDR17



Injected / Sprøjtetøbt

Long Spigot / Lang model


*Not suitable for ANSI flange. Please check page 25 for suitable flanges /

Passer ikke for ANSI flange. Se side 25 for flanger

**With welded pipes / Påsvejst rør



5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
*63	07 7751 368	78	102		88	14	120	3,8	0,160	60
*75	07 7751 380	92	122		97	16	130	4,5	0,272	60
*90	07 7751 395	108	139		106	17	140	5,4	0,350	45
110	07 7751 415	125	158		113	17	155	6,6	0,530	24
125	07 7751 430	135	158		120	20	160	7,4	0,570	16
140	07 7751 445	155	188		128	18	188	8,3	1,108	12
160	07 7751 465	175	212	154	147	18	185	9,5	1,070	12
180	07 7751 485	188	212	164	111	20	153	10,7	1,110	12
200	07 7751 505	230	268	208	125	24	188	11,9	1,912	4
225	07 7751 530	238	268	208	156	24	205	13,4	2,316	4
250	07 7751 555	288	320	260	133	25	186	14,8	2,841	2
280	07 7751 585	288	320	260	148	25	213	16,6	3,958	2
315	07 7751 620	338	375	305	166	25	223	18,7	4,470	2
355	07 7751 660	376	435	350	174	30	227	21,1	6,062	1
400	07 7751 705	430	485	396	185	33	242	23,7	8,328	1
**450(DN450)	07 7751 755	465	545	442	195	45	335	26,7	14,260	1
**450(DN500)	07 7751 756	517	585	485	195	45	335	26,7	15,120	1
**500	07 7751 805	530	590	497	212	46	339	29,7	16,880	1
*/**560	07 7751 865	618	690	580	235	50	373	33,2	24,170	1
*/**630	07 7751 935	645	690	585	255	50	384	37,4	28,420	1
**710	07 7752 407	740	800	670	282	50	422	42,1	40,540	1
**800	07 7752 408	843	905	780	312	60	463	47,4	55,390	1
**900	07 7752 409	947	1005	884	345	60	507	53,3	74,350	1
**1000	07 7752 410	1050	1112	972	379	65	557	59,3	101,260	1
**1200		1240	1320	1167	447	75	620	71,2	177,110	1

FLANGE ADAPTOR PE 100 SDR11

Flange adapter PE100 SDR11


Injected / Sprøjtetøbt

Short Spigot / Kort model

*Not suitable for ANSI flange. Please check page 26 for suitable flanges / Passer ikke for ANSI flange. Se side 26 for flanger.



DK-VAND



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
200		232	268	208	50	32	120	18,2	1,860	6
225		238	268	208	53	32	120	20,5	1,980	6
250		288	320	260	45	35	120	22,7	2,640	3
280		288	320	260	46	35	120	25,4	2,871	3
315		338	375	305	47	35	120	28,6	3,730	4
355		376	435	345	45	45	120	32,3	5,300	2
400		430	485	396	40	50	124	36,4	6,740	2
450(DN450)		465	545	442	40	66	140	40,9	11,520	1
450(DN500)		517	585	480	40	65	160	40,9	12,640	1
500		530	590	494	40	60	134	45,5	11,280	1
*/*560		618	690	580	43	80	180	50,8	19,710	1
*630		645	690	576	45	65	140	57,2	16,160	1
710		740	800	663	40	75	154	64,9	24,150	1

FLANGE ADAPTOR (SUITABLE FOR ANSI FLANGE) PE 100 SDR11

Flange adapter (passer for ANSI flange) PE100 SDR11

Injected / Sprøjtetøbt


Long Spigot / Lang model

Suitable for ANSI flange / Passer for ANSI flange

*With welded pipes / Påsvejst rør



DK-VAND



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
25		34	54		62	9	81	3,0	0,038	50
32		42	64		61	10	86	3,0	0,052	40
40		51	73		60	11	88	3,7	0,072	70
50		62	82		63	12	92	4,6	0,122	50
63		78	100		88	14	120	5,8	0,190	60
75		92	119		97	16	130	6,8	0,300	60
90		108	132		103	17	140	8,2	0,420	45
*/*560		580	654	549	235	80	423	50,9	38,400	1
*630		650	710	576	255	65	404	57,3	43,500	1

FLANGE ADAPTOR PE 100 SDR17

Flange adapter PE100 SDR17

Injected / Sprøjtetøbt

Short Spigot / Kort model


*Not suitable for ANSI flange.

Please check page 26 for suitable flanges / Passer ikke for ANSI flange.

Se side 26 for flanger.



DK-VAND



5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand

d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
200		230	268	208	57	24	120	11,9	1,390	6
225		238	268	208	61	24	120	13,4	1,450	6
250		288	320	260	55	25	120	14,8	1,940	3
280		288	320	260	56	25	120	16,6	2,090	3
315		338	375	305	57	25	120	18,7	2,720	4
355		376	435	350	60	30	120	21,1	3,800	2
400		430	485	396	52	33	120	23,7	4,710	2
450(DN450)		465	545	442	40	45	134	26,7	7,300	1
450(DN500)		517	585	485	40	45	134	26,7	8,160	1
500		530	590	497	45	46	120	29,7	7,540	1
*560		618	690	580	36	50	130	33,2	11,210	1
*630		645	690	585	45	50	120	37,4	10,600	1
710		740	800	670	40	50	130	42,1	15,610	1
800		843	905	780	45	60	140	47,4	20,450	1
900		947	1005	884	45	60	150	53,3	25,550	1
1000		1050	1112	972	45	65	165	59,3	35,070	1
1200		1240	1320	1167	31	75	172	71,2	62,000	1

FLANGE ADAPTOR (SUITABLE FOR ANSI FLANGE) PE 100 SDR17

Flange adapter (passer for ANSI flange) PE100 SDR17

Injected / Sprøjtetøbt


Long Spigot / Lang model

Suitable for ANSI flange / Passer for ANSI flange

*With welded pipes / Påsvejst rør



DK-VAND



5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand

d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
63		78	100		88	14	120	3,8	0,160	60
75		92	119		97	16	130	4,5	0,240	60
90		108	132		106	17	140	5,4	0,330	45
*560		580	654	570	235	80	423	33,2	24,170	1
*630		650	710	585	255	50	404	37,4	29,400	1
*900		940	1005	880	345	60	507	53,3	73,200	1
*1000		1040	1112	964	379	65	557	59,3	100,500	1
*/*1200		1240	1320	1145	447	75	620	71,2	170,500	1


FLANGE ADAPTOR (SUITABLE FOR ANSI FLANGE) PE 100 SDR11

Flange adaptor (Passer for ANSI flange) PE100 SDR11

Injected / Sprøjtetøbt
Short Spigot / Kort model
Suitable for ANSI flange / Passer for ANSI flange



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
*560		580	654	549	43	80	180	50.9	19.200	1
630		650	710	576	45	65	140	57.3	16.600	1


FLANGE ADAPTOR (SUITABLE FOR ANSI FLANGE) PE 100 SDR17

Flange adaptor (Passer for ANSI flange) PE100 SDR17

Injected / Sprøjtetøbt
Short Spigot / Kort model
Suitable for ANSI flange / Passer for ANSI flange




5 bar Gas - 10 bar Water / 5 bar Gas - 10 bar Vand



d	Article No VVS nr	d1	d2	d3	le	L	Z	s	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
560		580	654	570	43	80	180	33,2	12,930	1
630		650	710	585	45	50	120	37,4	11,200	1
900		940	1005	880	45	60	150	53,3	25,500	1
1000		1040	1112	964	45	65	165	59,3	35,000	1
*1200		1240	1320	1145	31	75	172	71,2	62,000	1

PP COVERED FLANGE WITH STEEL CORE, METRIC

PP belagt stålflange, metrisk

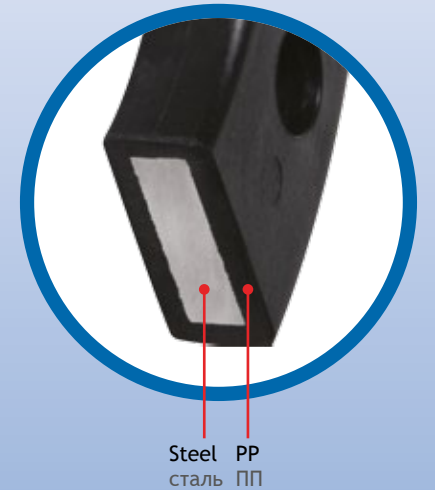

PP COVERED FLANGE WITH STEEL CORE, ANSI

PP belagt stålflange, ANSI



Injection moulded PP coating
No corrosion by diffusion, suitable for all types of

Applicable for outside applications, UV-resistant
High operational reliability at permanent load
Operating temperatures up to 80 °C
(subject to condition)

No deformation by controlled torque, high
bending strength

Price-wise competitiveness over stainless steel


BACKING FLANGE, PP-STEEL METRIC

PP belagt stålflange, metrisk

PP 30% Glass-fibre Reinforced with steel ring /
PP 30% fiber forstærket med stål
UV-Resistant suitable for outdoor use / UV bestandig for udendørs brug
Connecting dimension ISO 7005, EN 1092, BS 4504, DIN 2501 / Boret
efter: ISO 7005, EN 1092 , BS 4504 , DIN 2501

Bolt circle PN16 / Bolte diameter PN16

d	DN	Article No VVS nr	D	a	k	b	i	Bolt Bolte	Hole Qty Antal huller	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
20	15		95	28	65	12	14	M12	4	0,232	85
25	20	07 78703 305	105	34	75	12	14	M12	4	0,288	68
32	25	07 7870 337	115	42	85	16	14	M12	4	0,544	52
40	32	07 7870 345	140	51	100	16	18	M16	4	0,836	20
50	40	07 7870 355	150	62	110	18	18	M16	4	0,902	15
63	50	07 7870 368	165	78	125	18	18	M16	4	1,074	15
75	65	07 7870 380	188	92	145	18	18	M16	4	1,368	15
90	80	07 7870 395	204	108	160	20	18	M16	8	1,516	10
110	100	07 7870 415	224	128	180	20	18	M16	8	1,960	10
125	100	07 7870 430	224	135	180	20	18	M16	8	1,938	10
140	125	07 7870 445	252	158	210	24	18	M16	8	2,866	6
160	150	07 7870 465	285	178	240	24	22	M20	8	3,576	6
180	150	07 7870 485	285	188	240	24	22	M20	8	3,298	6
200	200	07 7870 505	340	235	295	27	22	M20	12	5,032	4
225	200		340	238	295	27	22	M20	12	4,900	4
250	250		419	288	355	32	26	M24	12	10,182	2
280	250		419	294	355	32	26	M24	12	9,860	2
315	300		478	338	410	34	26	M24	12	13,150	2
355	350		532	376	470	42	26	M24	16	22,200	1
400	400		592	430	525	46	30	M27	16	26,214	1

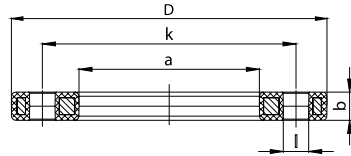


BACKING FLANGE, PP-STEEL ANSI

PP belagt stålflange, ANSI

PP 30% Glass-fibre Reinforced with steel ring / PP 30% fiber forstærket med stål
UV-Resistant suitable for outdoor use / UV bestandig for udendørs brug
Connecting dimension ANSI ASME B16.5 class 150, ASTM D4024, BS 1560, BS EN 1759 / Boret efter: ANSI ASME B16.5 class 150, ASTM D4024, BS 1560, BS EN 1759

Bolt circle class 150 / Bolte diameter klasse 150

d	DN	gevind	Article No VVS nr	D	a	k	b	i	Bolt Bolte	Hole Qty Antal huller	Weight Vægt	Box Kasse
mm	mm			mm	mm	mm	mm	mm	mm	mm	kg	
20	15	½"		95	28	60,5	12	16	M12	4	0,200	85
25	20	¾"		102	34	69,9	12	16	M12	4	0,024	68
32	25	1"		114	42	79,3	16	16	M12	4	0,490	52
40	32	1¼"		130	51	88,9	16	16	M12	4	0,670	20
50	40	1½"		133	62	98,6	18	16	M12	4	0,640	15
63	50	2"		165	78	120,6	18	20	M16	4	1,020	15
75	65	2½"		184	92	139,7	18	20	M16	4	1,310	15
90	80	3"		194	111	152,4	20	20	M16	4	1,420	10
110	100	4"		229	133	190,5	20	20	M16	8	1,920	10
160	150	6"		283	178	241,3	24	22	M20	8	3,750	6
180	150	6"		285	188	241,3	24	22	M20	8	3,298	6
200	200	8"		345	236	298,5	27	22	M20	8	6,040	4
250	250	10"		412	288	361,9	32	32	M22	12	9,740	2
315	300	12"		487	338	431,8	32	25	M22	12	15,380	2
355	350	14"		533	376	476,2	42	28,5	M27	12	24,940	1
400	400	16"		596	430	539,7	44	28,5	M27	16	34,770	1

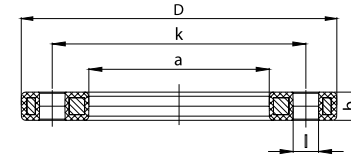


BACKING FLANGE, PP-STEEL METRIC

PP belagt stålflange, metrisk

PP 30% Glass-fibre Reinforced with steel ring /
PP 30% fiber forstærket med stål
UV-Resistant suitable for outdoor use / UV bestandig for udendørs brug
Connecting dimension ISO 7005, EN 1092, BS 4504, DIN 2501 / Boret
efter: ISO 7005, EN 1092 , BS 4504 , DIN 2501

Bolt circle PN10 / Bolte diameter PN10

d	DN	Article No VVS nr	D	a	k	b	i	Bolt Bolte	Hole Qty Antal huller	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	mm	mm	kg	(pcs/stk)
200	200	07 7770 505	340	235	295	27	22	M20	8	5,318	4
225	200	07 7770 530	340	238	295	27	22	M20	8	5,500	4
250	250	07 7770 555	395	288	350	30	22	M20	12	6,962	4
280	250	07 7770 585	395	294	350	30	22	M20	12	7,092	4
315	300	07 7770 620	445	338	400	34	22	M20	12	9,428	2
355	350	07 7770 660	514	376	460	40	22	M20	16	19,285	1
400	400	07 7770 705	571	430	515	40	26	M24	16	21,370	1
450	500		678	517	620	45	26	M24	20	34,520	1
500	500		688	533	620	45	26	M24	20	34,000	1
560	600		799	618	725	50	30	M27	20	49,000	1
630	600		799	645	725	50	30	M27	20	40,000	1

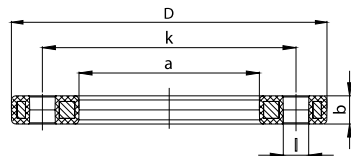

TRANSITION ADAPTOR PE

Gevind overgang PE

·DK-VAND·




MALE THREAD PE 100 SDR11 / Udvendt gevind PE100 SDR11

Injected / Sprøjtestøbt
Long Spigot / Lang model

10 bar Water / 10 bar Vand

d	R	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"		34	65	3,0	0,020	100
25	¾"		33	65	3,0	0,023	100
32	1"		38	73	3,0	0,040	90
40	1"		44	80	3,7	0,060	100
40	1¼"		44	83	3,7	0,065	100
50	1½"		48	87	4,6	0,092	100
63	1½"		62	101	5,8	0,156	60
63	2"		62	106	5,8	0,166	60



TRANSITION ADAPTOR PE-BRASS (MS58)

Gevind overgang messing

·DK-VAND·




MALE THREAD PE 100 SDR11 / Udvendt gevind PE100 SDR11

Injected / Sprøjtestøbt
Long Spigot / Lang model

16 bar Water / 16 bar Vand

d	R	Article No VVS nr	Z	le	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"		90	41	3,0	0,084	100
25	¾"		84	41	3,0	0,104	75
32	1"		103	44	3,0	0,208	50
40	1¼"		122	49	3,7	0,310	25
50	1½"		121	55	4,6	0,398	25
63	2"		140	63	5,8	0,578	10
75	2½"		146	70	6,8	0,982	9
90	3"		168	79	8,2	1,380	5
110	4"		179	82	10,0	2,030	2
125	4"		186	87	11,4	2,226	2



TRANSITION ADAPTOR PE

Gevind overgang PE

·DK-VAND·




FEMALE THREAD PE 100 SDR11 / Indvendigt gevind PE100 SDR11

Injected / Sprøjtestøbt
Long Spigot / Lang model
Reinforcing ring stainless / Forstærket med rustfri ring

10 bar Water / 10 bar Vand

d	R	Article No VVS nr	le	Z	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"		34	59	3,0	0,020	100
25	¾"		34	61	3,0	0,023	100
32	1"		37	68	3,0	0,045	90
40	1"		41	72	3,7	0,070	100
40	1¼"		42	79	3,7	0,065	100
50	1½"		49	86	4,6	0,105	100
63	1½"		49	86	5,8	0,180	60
63	2"		48	90	5,8	0,156	60



TRANSITION ADAPTOR PE-BRASS (MS58)

Gevind overgang messing

·DK-VAND·




FEMALE THREAD PE 100 SDR11 / Indvendigt gevind PE100 SDR11

Injected / Sprøjtestøbt
Long Spigot / Lang model

16 bar Water / 16 bar Vand

d	R	Article No VVS nr	Z	le	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"		72	41	3,0	0,058	100
25	¾"		72	41	3,0	0,072	98
32	1"		84	44	3,0	0,152	48
40	1¼"		98	49	3,7	0,318	18
50	1½"		101	55	4,6	0,304	18
63	2"		115	63	5,8	0,386	16
75	2½"		129	70	6,8	0,828	9
90	3"		144	79	8,2	1,122	5
110	4"		147	82	10,0	1,732	4
125	4"		153	87	11,4	1,806	2



TRANSITION ADAPTOR PE-BRASS (MS58)

Gevind overgang PE-belagt indvendigt messing

MALE THREAD PE 100 SDR11
Udvendt gevind PE100 SDR11


•DK-VAND•




Injected / Sprøjtestøbt
Long Spigot / Lang model

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	R	Article No VVS nr	Z	le	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"	07 7880 425	76	41	3,0	0,069	100
25	¾"	07 7880 430	79	41	3,0	0,099	75
32	1"	07 7880 437	86	44	3,0	0,150	50
40	1¼"	07 7880 445	101	49	3,7	0,270	25
50	1½"	07 7880 455	112	55	4,6	0,400	25
63	2"	07 7880 468	125	63	5,8	0,540	10



16 bar Water / 16 bar Vand



TRANSITION ADAPTOR PE-BRASS (MS58)

Gevind overgang med messing omløber

LOOSE NUT PE 100 SDR11
Messing omløber PE100 SDR11

•DK-VAND•



Injected / Sprøjtestøbt
Long Spigot / Lang model

16 bar Water / 16 bar Vand

d	R	Article No VVS-nr	Z	le	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"		78	41	3,0	0,086	100
25	¾"		77	41	3,0	0,113	98
32	1"		85	44	3,0	0,184	48
40	1¼"		97	49	3,7	0,289	18
50	1½"		112	55	4,6	0,452	18
63	2"		122	63	5,8	0,660	16

TRANSITION ADAPTOR PE-BRASS (MS58)

Gevind overgang messing

FEMALE THREAD PE 100 SDR11
Indvendigt gevind PE100 SDR11


•DK-VAND•



Injected / Sprøjtestøbt
Long Spigot / Lang model

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	R	Article No VVS-nr.	Z	le	s	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	kg	(pcs/stk)
20	½"	07 7880 525	75	41	3,0	0,076	100
25	¾"	07 7880 530	78	41	3,0	0,104	98
32	1"	07 7880 537	85	44	3,0	0,154	48
40	1¼"	07 7880 545	100	49	3,7	0,270	18
50	1½"	07 7880 555	111	55	4,6	0,380	18
63	2"	07 7880 568	124	63	5,8	0,540	16



TRANSITION ADAPTOR PE-STEEL


Gevind overgang PE-stål

PE 100 SDR11 / GR-B

Long Spigot / Lang model
Steel pipe GR-B API 5L EN10208-1, epoxy or PE coated for corrosion resistance /
Stålrør GR-B API 5L EN10208-1, epoxy eller PE belagt som korrosionsbeskyttelse
Welding end / Svejse end

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	R	Article No VVS nr	le	Z	s1	s2	Weight Vægt	Box Kasse
mm	gevind		mm	mm	mm	mm	kg	(pcs/stk)
25	¾"		43	396	3,0	2,9	0,650	30
32	1"		100	440	3,0	3,4	0,950	16
40	1¼"		57	404	3,7	3,6	1,310	9
50	1½"		62	420	4,6	3,7	1,570	9
63	2"		106	483	5,8	3,9	2,450	9
75	2½"		70	474	6,8	5,2	3,710	4
90	3"		83	482	8,2	5,5	5,110	4
110	4"		156	583	10,0	6,0	7,760	2
125	4"		92	525	11,4	6,0	7,670	2
125	6"		170	666	11,4	7,1	14,900	1
160	6"		110	592	14,6	7,1	14,744	1
180	6"		110	591	16,4	7,1	15,480	1
200	8"		112	675	18,2	8,2	44,510	1
225	8"		120	675	20,5	8,2	44,840	1
250	10"		129	765	22,7	9,3	71,890	1
280	10"		139	745	25,4	9,3	72,080	1
315	12"		150	850	28,6	9,5	106,370	1



EF COUPLER PE 100 SDR11 (SDR11/17 75-400mm)


Elektromuffe PE100 SDR11 (SDR11/17 75-400mm)



DK-VAND

Injected (up to 400mm) / Sprøjtestøbt op til 400mm
4mm pin connectors / 4mm pin
Removable center stopper (up to 400mm) /
Fjernbart centerstop op til 400mm
Machined from pipe (450-1200mm) / Bearbejdet af rør (450-1200mm)
Weldable for SDR11 and SDR17 between 75-400 /
Svejsbar for SDR11 alle dim. og SDR17 75-400mm

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	D	Z	Weight Vægt	Box Kasse
mm		mm	mm	kg	(pcs/stk)
20	07 8323 325	29	77	0,033	80
25	07 8323 330	34	77	0,037	80
32	07 8323 337	43	77	0,057	75
40	07 8323 345	52	90	0,080	90
50	07 8323 355	62	91	0,096	70
63	07 8323 368	80	98	0,164	18
75	07 8323 380	94	110	0,221	16
90	07 8323 395	111	124	0,378	12
110	07 8323 415	136	144	0,652	15
125	07 8323 430	151	154	0,769	16
140	07 8323 445	169	162	0,944	12
160	07 8323 465	193	172	1,327	10
180	07 8323 485	217	184	1,907	8
200	07 8323 505	241	198	2,445	4
225	07 8323 530	271	212	3,269	4
250	07 8323 555	304	228	4,391	2
280	07 8323 585	340	244	6,080	1
315	07 8323 620	380	264	7,940	1
355	07 8323 660	433	280	10,330	1
400	07 8323 705	488	300	14,320	1
450	07 8323 755	560	320	19,100	1
*500	07 8323 805	621	360	27,860	1
*560	07 8323 865	695	390	38,800	1
*630	07 8323 935	780	430	52,200	1
*710		882	475	72,450	1
*800		993	520	102,490	1
*900		1115	550	137,930	1
*1000		1238	600	193,500	1
*1200		1483	650	285,600	1


EF COUPLER PE 100 SDR17

Elektro muffe PE100 SDR17

DK-VAND



Machined from pipe / Bearbejdet af rør
4mm pin connectors / 4mm pin



d	Article No VVS nr	D	Z	Weight Vægt	Box Kasse
mm		mm	mm	kg	(pcs/stk)
*450	07 8223 755	520	320	14,800	1
500	07 8223 805	577	360	20,100	1
560	07 8223 865	645	390	27,500	1
630	07 8223 935	724	430	37,800	1
710		819	475	49,370	1
800		921	520	69,180	1
900		1035	550	93,150	1
1000		1149	600	125,650	1
1200		1376	650	196,450	1

EF ELBOW 90° PE 100 SDR11


Elektro vinkel 90° PE100 SDR11

DK-VAND



Injected / Sprøjtestøbt
4mm pin connectors / 4mm pin

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	D	Z	le	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
20	07 8306 325	43	63	40	0,150	40
25	07 8306 330	35	60	41	0,060	100
32	07 8306 337	44	62	40	0,100	80
40	07 8306 345	52	65	42	0,120	55
50	07 8306 355	63	72	45	0,170	50
63	07 8306 368	81	84	50	0,310	25
75	07 8306 380	95	92	53	0,440	16
90	07 8306 395	113	109	60	0,680	15
110	07 8306 415	137	135	73	1,150	6
125	07 8306 430	154	152	78	1,640	6
160	07 8306 465	201	205	87	5,000	2
180	07 8306 485	222	197	90	4,120	2

EF ELBOW 45° PE 100 SDR11


Elektro vinkel 45° PE100 SDR11



DK-VAND

Injected / Sprøjtestøbt
4mm pin connectors / 4mm pin

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	Article No VVS nr	D	Z	le	Weight Vægt	Box Kasse
mm		mm	mm	mm	kg	(pcs/stk)
32	07 8308 337	44	99	40	0,080	100
40	07 8308 345	53	108	41.5	0,100	70
50	07 8308 355	63	124	44.5	0,130	50
63	07 8308 368	78.5	137	50	0,230	30
75	07 8308 380	94	153	53	0,350	20
90	07 8308 395	117	177	60	0,550	18
110	07 8308 415	137	213	75	0,930	10
125	07 8308 430	154	240	79	1,250	6
160	07 8308 465	201	283	89	4,500	2
180	07 8308 485	222	299	90	3,130	2

EF TEE 90°, EQUAL PE 100 SDR11


Elektro tee 90° PE100 SDR11

Injected / Sprøjttestøbt
4mm pin connectors / 4mm pin



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	Article No VVS nr	D	Z	L	le1	le2	Weight Vægt	Box Kasse
mm		mm	mm	mm	mm	mm	kg	(pcs/stk)
20	07 8312 325	44	98	90	35	65	0,140	50
25	07 8312 330	44	98	90	35	65	0,130	50
32	07 8312 337	44	98	90	35	65	0,110	50
40	07 8312 345	52	131	91	44	59	0,160	18
50	07 8312 355	64	138	96	43	55	0,190	25
63	07 8312 368	82	164	113	49	63	0,360	20
75	07 8312 380	95	189	129	55	70	0,550	14
90	07 8312 395	112	210	148	65	79	0,820	16
110	07 8312 415	139	260	169	72	82	1,450	6
125	07 8312 430	160	268	182	77	87	2,240	4
160	07 8312 465	195	320	210	86	98	3,340	2
180	07 8312 485	230	340	230	88	105	5,300	2



EF REDUCER PE 100 SDR11


Elektro reduktion PE100 SDR11

Injected / Sprøjttestøbt
4mm pin connectors / 4mm pin



10 bar Gas 16 bar Water / 10 bar Gas - 16 bar Vand

d1	d2	Article No VVS nr	D1	D2	le1	le2	Z	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	kg	(pcs/stk)
25	20	07 8325 330	34	29	38	36	77	0,035	75
32	25	07 8325 337	43	34	39	37	77	0,052	75
32	20	07 8326 337	43	29	39	37	77	0,048	75
40	32	07 8325 345	52	44	46	43	91	0,080	100
50	40	07 8325 355	62	52	46	43	91	0,100	80
50	32	07 8326 355	62	44	46	41	91	0,090	80
63	50	07 8325 368	78	62	52	48	102	0,150	60
63	40	07 8326 368	78	52	52	45	102	0,140	60
63	32	07 8327 368	78	44	52	44	102	0,140	60
75	63	07 8325 380	98	82	61	57	126	0,440	28
90	63	07 8326 395	110	79	61	55	123	0,300	35
110	90	07 8325 415	134	112	68	62	137	0,550	20
110	63	07 8327 415	135	80	71	53	158	0,540	24
125	90	07 8326 430	152	112	75	62	145	0,700	12
160	110	07 8327 465	200	140	89	73	184	1,640	6
160	90	07 8326 465	187	116	92	67	175	1,510	6
180	125	07 8327 485	216	157	115	90	221	2,090	4



EF 90° TEE, REDUCED PE 100 SDR11


Elektro tee reduceret 90° PE100 SDR11

Injected / Sprøjttestøbt
4mm pin connectors / 4mm pin



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d1	d2	Article No VVS nr	D	Z	L	le1	le2	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	mm	kg	(pcs/stk)
50	40	07 8313 355	64	138	89	43	49	0,300	25
63	50	07 8313 368	82	164	105	49	55	0,330	20
63	40	07 8314 368	82	164	98	49	49	0,310	20
63	32	07 8315 368	82	164	92	49	44	0,300	20
75	63	07 8313 380	95	189	122	55	63	0,520	14
90	63	07 8314 395	112	210	132	65	63	0,740	16
110	90	07 8313 415	139	260	165	72	79	1,330	6
110	63	07 8315 415	139	260	149	72	63	1,220	6
125	110	07 8313 430	160	268	175	77	82	1,630	4
125	90	07 8314 430	160	268	171	77	79	1,550	4
125	63	07 8316 430	160	268	150	77	63	1,440	4
160	110	07 8315 465	195	320	191	86	82	2,890	2
160	90	07 8316 465	195	320	185	86	79	2,790	2
160	63	07 8317 565	195	320	168	86	63	2,700	2
180	125	07 8315 485	230	340	207	88	87	3,830	2



EF TAPPING SADDLE PE 100 SDR11

Elektro anbringssadel m/fræser PE100 SDR11




•DK-VAND•




Injected monoblock type / Sprøjttestøbt monoblok
4mm pin connectors / 4mm pin
Long spigot outlet / Lang spidsende
wrench 12mm / 12mm unbrako
O-ring sealed leakproof cap / Topdæksel m/o-ring
Stainless steel cutters / Rustfri fræser

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand



d	d1	Article No VVS nr	le	h	h1	Z	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	kg	(pcs/stk)
40	32		76	135	38	114	0,333	20
40	25	07 8571 338	75	135	38	114	0,323	20
40	20		67	135	38	104	0,313	20
50	32	07 8571 348	76	135	43	117	0,333	20
50	25	07 8571 347	75	135	43	113	0,323	20
50	20		64	135	43	105	0,313	20
63	63	07 8571 363	107	180	51	149	0,675	18
63	50	07 8571 362	92	180	51	138	0,628	20
63	40	07 8571 361	85	180	51	126	0,593	20
63	32	07 8571 360	76	180	51	117	0,588	20
63	25	07 8571 359	75	180	51	116	0,578	20
63	20		75	180	51	116	0,578	20
75	63	07 8571 374	107	186	56	152	0,697	15
75	50	07 8571 373	92	186	56	140	0,644	15
75	40	07 8571 372	82	186	56	126	0,624	15
75	32	07 8571 371	76	186	56	118	0,597	15
75	25	07 8571 370	75	186	56	117	0,590	15
75	20		75	186	56	113	0,590	15
90	63	07 8571 388	100	195	65	160	0,788	12
90	50	07 8571 387	92	195	65	148	0,730	12
90	40	07 8571 386	85	195	65	136	0,696	12
90	32	07 8571 385	76	195	65	120	0,680	12
90	25	07 8571 384	75	195	65	120	0,680	12
90	20		75	195	65	120	0,680	12
110	63	07 8571 407	100	200	75	165	0,836	10
110	50	07 8571 406	92	200	75	156	0,786	10
110	40	07 8571 405	84	200	75	140	0,756	10
110	32	07 8571 404	76	200	75	126	0,726	10
110	25	07 8571 403	75	200	75	120	0,716	10
110	20		75	200	75	120	0,716	10
125	63	07 8571 420	100	212	82	170	0,882	8
125	50	07 8571 419	92	212	82	160	0,819	8
125	40	07 8571 418	85	212	82	143	0,782	8
125	32	07 8571 417	76	212	82	129	0,757	8
125	25		75	212	82	120	0,757	8
125	20	07 8571 415	75	212	82	120	0,757	8
140	63	07 8571 435	100	238	95	182	0,976	6
140	50	07 8571 434	92	238	95	164	0,926	6
140	40	07 8571 433	85	238	95	150	0,859	6



EF TAPPING SADDLE PE 100 SDR11

Elektro anbringssadel m/fræser PE100 SDR11



•DK-VAND•



Injected monoblock type / Sprøjttestøbt monoblok
4mm pin connectors / 4 mm pin
Long spigot outlet / Lang spidsende
wrench 12mm / 12mm unbrako
O-ring sealed leakproof cap / Topdæksel m/O-ring
Stainless steel cutters / Rustfri fræser

10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand

d	d1	Article No VVS nr	le	h	h1	Z	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	kg	(pcs/stk)
140	32	07 8571 432	76	238	95	134	0,826	6
140	25	07 8571 431	75	238	95	126	0,826	6
140	20		75	238	95	125	0,809	6
160	63	07 8571 454	100	247	105	185	0,993	6
160	50	07 8571 453	92	247	105	171	0,926	6
160	40	07 8571 452	85	247	105	156	0,893	6
160	32	07 8571 451	76	247	105	141	0,893	6
160	25	07 8571 450	75	247	105	127	0,893	6
160	20		75	247	105	124	0,859	6
180	63	07 8571 473	100	250	115	192	1,031	5
180	50	07 8571 472	92	250	115	175	0,971	5
180	40	07 8571 471	85	250	115	160	0,931	5
180	32	07 8571 470	76	250	115	143	0,911	5
180	25	07 8571 469	75	250	115	127	0,891	5
180	20		75	250	115	127	0,871	5
200	63	07 8571 492	100	268	125	194	1,114	4
200	50	07 8571 491	92	268	125	173	1,064	4
200	40	07 8571 490	84	268	125	160	0,989	4
200	32	07 8571 489	76	268	125	146	0,989	4
200	25	07 8571 488	75	268	125	137	0,964	4
200	20		75	268	125	126	0,939	4
225	63	07 8571 216	100	281	137	195	1,164	4
225	50	07 8571 215	92	281	137	181	1,139	4
225	40	07 8571 214	83	281	137	165	1,064	4
225	32	07 8571 213	76	281	137	148	1,039	4
225	25	07 8571 212	75	281	137	130	1,014	4
225	20		75	281	137	125	1,014	4
250	63	07 8571 240	100	321	217	145	1,302	4
250	50	07 8571 239	92	321	217	135	1,298	4
250	40	07 8571 238	85	321	217	135	1,298	4
250	32	07 8571 237	76	321	217	123	1,280	4
250	25	07 8571 236	75	321	217	123	1,272	4
250	20		75	321	217	123	1,268	4
*280/315	63	07 8571 303	100	358	254	145	1,302	4
*280/315	50	07 8571 302	92	358	254	135	1,298	4
*280/315	40	07 8571 301	83	358	254	135	1,298	4
*280/315	32	07 8571 300	76	358	254	123	1,280	4
*280/315	25	07 8571 299	75	358	254	123	1,272	4
*280/315	20		75	358	254	123	1,268	4

*Only for water / Kun til vand

EF TAPPING SADDLE WITH GAS STOP PE 100 SDR11

Elektro anbringssadel m/fræser m/gasstop PE100 SDR11




Injected monoblock type / Sprøjttestøbt monoblok
4mm pin connectors / 4mm pin
Long spigot outlet / Lang spidsende
Gas-Stop System Pipelife (GS 20/1, GS 32/1)
Without overflow orifice / Uden overløbsåbning
Hexagon wrench 12 mm / 12mm unbrako
Stainless steel cutters / Rustfri fræser
Set comes pre-assembled / Leveres formonteret
O-ring sealed screw cap / Topdæksel m/O-ring



1-5 bar Gas / 1-5 bar Gas

d	d1	Article No VVS nr	le	h	h1	Z	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	kg	(pcs/stk)
40	32		76	135	38	114	0,333	20
40	20		67	135	38	104	0,313	20
50	32		76	135	43	117	0,333	20
50	20		64	135	43	105	0,313	20
63	32		76	180	51	117	0,588	20
63	20		75	180	51	116	0,578	20
75	32		76	186	56	118	0,597	15
75	20		75	186	56	113	0,590	15
90	32		76	195	65	120	0,680	12
90	20		75	195	65	120	0,680	12
110	32		76	200	75	126	0,726	10
110	20		75	200	75	120	0,716	10
125	32		76	212	82	129	0,757	8
125	20		75	212	82	120	0,757	8
140	32		76	238	95	134	0,826	6
140	20		75	238	95	125	0,809	6
160	32		76	247	105	141	0,893	6
160	20		75	247	105	124	0,859	6
180	32		76	250	115	143	0,911	5
180	20		75	250	115	127	0,871	5
200	32		76	268	125	146	0,989	4
200	20		75	268	125	126	0,939	4
225	32		76	281	137	148	1,039	4
225	20		75	281	137	125	1,014	4
250	32		76	293	137	148	1,049	4
250	20		75	293	137	125	1,024	4

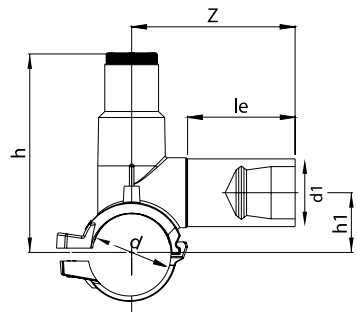

EF TAPPING VALVE PE 100 SDR11

Elektro anbringssadel m/ventil PE100 SDR11


•DK-VAND•



Injected monoblock type / Sprøjttestøbt monoblok
4mm pin connectors / 4 mm pin
Long spigot outlet / Lang spidsende
The valve is closed clockwise / Ventilen er lukket med uret
Opening on the spanner is 18 turns / Ventilen åbnes fuldt ved 18
omgange på spindel

16 bar Water / 16 bar Vand

d	d1	Article No VVS nr	le	h	h1	Z	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	kg	(pcs/stk)
63	63		100	223	114	152	2.360	6
63	50		74	223	114	126	2.330	6
63	40		74	223	114	126	2.320	6
63	32		74	223	114	126	2.300	6
63	25		74	223	114	126	2.280	6
63	20		74	223	114	126	2.270	6
75	63		100	229	120	152	2.490	6
75	50		74	229	120	126	2.460	6
75	40		74	229	120	126	2.450	6
75	32		74	229	120	126	2.430	6
75	25		74	229	120	126	2.410	6
75	20		74	229	120	126	2.400	6
90	63		100	237	128	152	2.450	6
90	50		74	237	128	126	2.420	6
90	40		74	237	128	126	2.410	6
90	32		74	237	128	126	2.390	6
90	25		74	237	128	126	2.370	6
90	20		74	237	128	126	2.360	6
110	63		100	247	138	152	2.510	6
110	50		74	247	138	126	2.480	6
110	40		74	247	138	126	2.470	6
110	32		74	247	138	126	2.450	6
110	25		74	247	138	126	2.430	6
110	20		74	247	138	126	2.420	6
125	63		100	254	145	152	2.540	6
125	50		74	254	145	126	2.510	6
125	40		74	254	145	126	2.500	6
125	32		74	254	145	126	2.480	6
125	25		74	254	145	126	2.460	6
125	20		74	254	145	126	2.520	6



EF TAPPING VALVE PE 100 SDR11

Elektro anbringssadel m/ventil PE100 SDR11


DK-VAND



Injected monoblock type / Monoblock Cast
4mm pin connectors / 4 mm pin stik
Long spigot outlet / Lang udløb til svejsning
The valve is closed clockwise / Ventilen lukkes med uret
Opening on the spanner is 18 turns / Åbning med en skruenøgle er 18 omdrejninger
Wrench 12mm / 12 mm skruenøgle

16 bar Water / 16 bar vand

d	d1	Article No VVS-nr.	le	h	h1	Z	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	mm	kg	(pcs/шт)
140	63		100	262	153	152	2.540	5
140	50		74	262	153	126	2.510	5
140	40		74	262	153	126	2.500	5
140	32		74	262	153	126	2.480	5
140	25		74	262	153	126	2.460	5
140	20		74	262	153	126	2.450	5
160	63		100	272	163	152	2.550	5
160	50		74	272	163	126	2.520	5
160	40		74	272	163	126	2.510	5
160	32		74	272	163	126	2.490	5
160	25		74	272	163	126	2.470	5
160	20		74	272	163	126	2.460	5
180/200	63		100	292	183	152	2.670	4
180/200	50		74	292	183	126	2.640	4
180/200	40		74	292	183	126	2.630	4
180/200	32		74	292	183	126	2.610	4
180/200	25		74	292	183	126	2.590	4
180/200	20		74	292	183	126	2.580	4
225/250	63		100	317	208	152	2.690	4
225/250	50		74	317	208	126	2.660	4
225/250	40		74	317	208	126	2.650	4
225/250	32		74	317	208	126	2.630	4
225/250	25		74	317	208	126	2.610	4
225/250	20		74	317	208	126	2.600	4
280/315	63		100	349	240	152	3.090	4
280/315	50		74	349	240	126	3.060	4
280/315	40		74	349	240	126	3.050	4
280/315	32		74	349	240	126	3.030	4
280/315	25		74	349	240	126	3.010	4
280/315	20		74	349	240	126	3.000	4




EF SPIGOT SADDLE PE 100 SDR11

Elektro-Sadeltee-PE 100 SDR 11

Injected / Støbt
Long Spigot / Forlænger
4mm pin connectors / Pin 4mm

DK-VAND



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand


d	d1	Article No VVS-nr.	Z	le	s	Weight Vægt	Box Kasse
mm	mm		mm	mm	mm	kg	(pcs/шт)
63	63	07 8572 363	75	67	5.8	0,230	18
63	32	07 8572 360	55	46	3.0	0,200	20
75	63	07 8572 374	75	67	5.8	0,260	15
75	32	07 8572 371	55	46	3.0	0,230	15
90	63	07 8572 388	75	67	5.8	0,310	12
90	32	07 8572 385	55	46	3.0	0,280	12
110	63	07 8572 407	75	67	5.8	0,360	10
110	32	07 8572 404	55	46	3.0	0,330	10
125	63	07 8572 421	75	67	5.8	0,370	8
125	32	07 8572 418	55	46	3.0	0,340	8
140	63	07 8572 435	75	67	5.8	0,650	6
140	32	07 8572 432	55	46	3.0	0,580	6
160	63	07 8572 454	75	67	5.8	0,660	6
160	32	07 8572 451	55	46	3.0	0,590	6
180-200	63	07 8572 492	75	67	5.8	0,710	4
180-200	32	07 8572 489	55	46	3.0	0,670	4
225-250	63	07 8572 492	75	67	5.8	0,750	4
225-250	32	07 8572 537	55	46	3.0	0,710	4
280-315	63	07 8572 603	75	67	5.8	0,790	4
280-315	32	07 8572 600	55	46	3.0	0,750	4

EF REPAIR SADDLE PE 100 SDR11

ES Reparationspude - PE100 SDR11

Injected / Støbt
4mm pin connectors / 4 mm pin

DK-VAND



10 bar Gas - 16 bar Water / 10 bar Gas - 16 bar Vand


d	Article No VVS-nr.	Z	Weight Vægt	Box Kasse
mm		mm	kg	(pcs/шт)
90	07 8577 390	14	0,300	15
110	07 8577 410	14	0,390	15
125	07 8577 425	14	0,390	15
140	07 8577 440	14	0,430	15
160	07 8577 460	14	0,430	10
180-200	07 8577 499	14	0,680	6
225-250	07 8577 549	14	0,720	6
280-315	07 8577 614	14	0,780	6

EF SADDLE-PE TRANSITION

ES Rørfitting med messingtråd PE100 SDR11

FEMALE THREAD PE 100 SDR11 /
Med indvendig gevind PE100 SDR11

DK-VAND



Injected / Støbt
4mm pin connectors / Pin 4 mm
Reinforcing ring stainless / Forstærkningsring i rustfrit stål

10 bar Water / 10 bar vand

d	R	Article No VVS-nr.	D	Z	Weight Vægt	Box Kasse
mm	inch		mm	mm	kg	(pcs/шт)
90	2"	07 8573 390	76.1	50	0,430	15
90	1½"	07 8573 389	63.5	45	0,400	15
90	1¼"	07 8573 388	52	45	0,380	15
90	1"	07 8573 387	45	45	0,380	15
110	2"	07 8573 410	76.1	50	0,490	15
110	1½"	07 8573 409	63.5	45	0,460	15
110	1¼"	07 8573 408	52	45	0,440	15
110	1"	07 8573 407	45	45	0,430	15
125	2"	07 8573 425	76.1	50	0,540	15
125	1½"	07 8573 424	63.5	45	0,510	15
125	1¼"	07 8573 423	52	45	0,500	15
125	1"	07 8573 422	45	45	0,480	15
140	2"	07 8573 440	76.1	50	0,560	12
140	1½"	07 8573 439	63.5	45	0,530	12
140	1¼"	07 8573 438	52	45	0,500	12
140	1"	07 8573 437	45	45	0,500	12
160	2"	07 8573 460	76.1	50	0,580	10
160	1½"	07 8573 459	63.5	45	0,550	10
160	1¼"	07 8573 458	52	45	0,530	10
160	1"	07 8573 457	45	45	0,510	10
180-200	2"	07 8573 499	76.1	50	0,790	6
180-200	1½"	07 8573 498	63.5	45	0,760	6
180-200	1¼"	07 8573 497	52	45	0,730	6
180-200	1"	07 8573 496	45	45	0,730	6
225-250	2"	07 8573 549	76.1	50	0,830	6
225-250	1½"	07 8573 548	63.5	45	0,800	6
225-250	1¼"	07 8573 547	52	45	0,770	6
225-250	1"	07 8573 546	45	45	0,770	6
280-315	2"	07 8573 614	76.1	50	0,880	6
280-315	1½"	07 8573 613	63.5	45	0,850	6
280-315	1¼"	07 8573 612	52	45	0,830	6
280-315	1"	07 8573 611	45	45	0,830	6

EF SADDLE-BRASS TRANSITION

ES adapterhylster


FEMALE THREAD PE 100 SDR11 /
Med indvendig gevind PE100 SDR11

•DK-VAND•



Injected / støb
4mm pin connectors / Pin 4 mm

10 bar Water / 10 bar vand



d	R	Article No VVS-nr.	D	Z	Weight Vægt	Box Kasse
mm	inch		mm	mm	kg	(pcs/шт)
90	2"	07 8573 590	79	50	0,570	15
90	1½"	07 8573 589	73	45	0,530	15
90	1¼"	07 8573 588	67	45	0,470	15
90	1"	07 8573 587	57	45	0,440	15
110	2"	07 8573 610	79	50	0,630	15
110	1½"	07 8573 609	73	45	0,540	15
110	1¼"	07 8573 608	67	45	0,520	15
110	1"	07 8573 607	57	45	0,490	15
125	2"	07 8573 625	79	50	0,650	15
125	1½"	07 8573 624	73	45	0,570	15
125	1¼"	07 8573 623	67	45	0,550	15
125	1"	07 8573 622	57	45	0,520	15
140	2"	07 8573 640	79	50	0,670	12
140	1½"	07 8573 639	73	45	0,590	12
140	1¼"	07 8573 638	67	45	0,570	12
140	1"	07 8573 637	57	45	0,530	12
160	2"	07 8573 660	79	50	0,700	10
160	1½"	07 8573 659	73	45	0,620	10
160	1¼"	07 8573 658	67	45	0,600	10
160	1"	07 8573 657	57	45	0,560	10
180-200	2"	07 8573 699	79	50	0,930	6
180-200	1½"	07 8573 698	73	45	0,860	6
180-200	1¼"	07 8573 697	67	45	0,860	6
180-200	1"	07 8573 696	57	45	0,850	6
225-250	2"	07 8573 749	79	50	1,030	6
225-250	1½"	07 8573 748	73	45	0,950	6
225-250	1¼"	07 8573 747	67	45	0,930	6
225-250	1"	07 8573 746	57	45	0,890	6
280-315	2"	07 8573 814	79	50	1,080	6
280-315	1½"	07 8573 813	73	45	1,000	6
280-315	1¼"	07 8573 812	67	45	0,980	6
280-315	1"	07 8573 811	57	45	0,950	6

EF BALLOON SADDLE PE 100 SDR11


ES-sadel til luftkammersystem strømafbrydelse

•DK-VAND•



Injected / Støbt
4mm pin connectors / pin 4 mm

10 bar Water / 10 bar vand



d	R	Article No VVS-nr.	R1	Z	Weight Vægt	Box Kasse
mm	inch		inch	mm	kg	(pcs/шт)
90	2"		2½"	50	1,620	15
110	2"		2½"	50	1,670	15
125	2"		2½"	50	1,700	15
140	2"		2½"	50	1,830	15
160	2"		2½"	50	1,850	10
180-200	2"		2½"	50	2,090	6
225-250	2"		2½"	50	2,100	6
280-315	2"		2½"	50	2,150	6



Unit Weight of PE 100 Pipes

Enhedsvægt på PE 100 rør

MRS=10 Mpa		C=1,25		σ=8,0MPa							
PN		4		5		6		8		10	
SDR		41		33		26		21		17	
Dia/mm		s (mm)	m (kg/m)	s (mm)	m (kg/m)	s (mm)	m (kg/m)	s (mm)	m (kg/m)	s (mm)	m (kg/m)
16											
20											
25										2,0	0,140
32										2,0	0,190
40								2,0	0,240	2,4	0,280
50						2,0	0,300	2,4	0,360	3,0	0,440
63				2,0	0,380	2,5	0,470	3,0	0,570	3,8	0,710
75		2,0	0,460	2,3	0,530	2,9	0,660	3,6	0,810	4,5	1,000
90		2,3	0,640	2,8	0,770	3,5	0,950	4,3	1,160	5,4	1,440
110		2,7	0,910	3,4	1,140	4,2	1,400	5,3	1,750	6,6	2,150
125		3,1	1,190	3,9	1,490	4,8	1,810	6,0	2,250	7,4	2,740
140		3,5	1,510	4,3	1,840	5,4	2,280	6,7	2,810	8,3	3,440
160		4,0	1,970	4,9	2,390	6,2	2,990	7,7	3,690	9,5	4,500
180		4,4	2,430	5,5	3,020	6,9	3,750	8,6	4,640	10,7	5,710
200		4,9	3,010	6,2	3,790	7,7	4,650	9,6	5,760	11,9	7,050
225		5,5	3,800	6,9	4,740	8,6	5,840	10,8	7,290	13,4	8,930
250		6,2	4,760	7,7	5,880	9,6	7,250	11,9	8,930	14,8	10,970
280		6,9	5,940	8,6	7,350	10,7	9,050	13,4	11,250	16,6	13,770
315		7,7	7,450	9,7	9,330	12,1	11,510	15,0	14,180	18,7	17,450
355		8,7	9,490	10,9	11,820	13,6	14,580	16,9	18,000	21,1	22,190
400		9,8	12,050	12,3	15,020	15,3	18,480	19,1	22,920	23,7	28,090
450		11,0	15,210	13,8	18,960	17,2	23,370	21,5	29,020	26,7	35,600
500		12,3	18,900	15,3	23,360	19,1	28,840	23,9	35,850	29,7	44,000
560		13,7	23,580	17,2	29,410	21,4	36,190	26,7	44,860	33,2	55,100
630		15,4	29,820	19,3	37,130	24,1	45,850	30,0	56,700	37,4	69,820
710		17,4	37,960	21,8	47,260	27,2	58,320	33,9	72,200	42,1	88,580
800		19,6	48,190	24,5	59,850	30,6	73,930	38,1	91,450	47,4	112,380
900		22,0	60,850	27,6	75,850	34,4	93,500	42,9	115,830	53,3	142,170
1000		24,5	75,290	30,6	93,450	38,2	115,370	47,7	143,100	59,3	175,730
1200		29,4	108,420	36,7	134,490	45,9	166,340	57,2	205,930	70,6	251,190
1400		34,3	147,570	42,9	183,410	53,5	226,200	66,7	280,150	82,4	342,020
1600		39,2	192,740	49,0	239,420	61,2	295,710	76,2	365,790	94,1	446,410

s: Wall Thickness (mm)
MRS: Minimum Required Strength (Mpa)

Unit Weight (kg/m)

C: Safety Coefficient
σ: Design Stress

Unit Weight of PE 100 Pipes

Enhedsvægt på PE 100 rør

MRS=10 Mpa		C=1,25		σ=8,0MPa							
PN	12,5		16		20		25		32		
SDR	13,6		11		9		7,4		6		
Dia/mm	s (mm)	m (kg/m)	s (mm)	m (kg/m)	s (mm)	m (kg/m)	s (mm)	m (kg/m)	s (mm)	m (kg/m)	
16					2,0	0,090	2,3	0,100	3,0	0,120	
20			2,0	0,110	2,3	0,130	3,0	0,160	3,4	0,180	
25	2,0	0,150	2,5	0,170	3,0	0,210	3,5	0,240	4,2	0,280	
32	2,4	0,220	3,0	0,270	3,6	0,320	4,4	0,380	5,4	0,450	
40	3,0	0,350	3,7	0,420	4,5	0,500	5,5	0,600	6,7	0,700	
50	3,7	0,540	4,6	0,660	5,6	0,780	6,9	0,940	8,3	1,090	
63	4,7	0,860	5,8	1,050	7,1	1,250	8,6	1,470	10,5	1,740	
75	5,6	1,220	6,8	1,460	8,4	1,760	10,3	2,100	12,5	2,460	
90	6,7	1,760	8,2	2,110	10,1	2,540	12,3	3,010	15,0	3,540	
110	8,1	2,600	10,0	3,150	12,3	3,790	15,1	4,510	18,3	5,290	
125	9,2	3,360	11,4	4,080	14,0	4,900	17,1	5,810	20,8	6,830	
140	10,3	4,210	12,7	5,090	15,7	6,150	19,2	7,310	23,3	8,570	
160	11,8	5,510	14,6	6,690	17,9	8,010	21,9	9,530	26,6	11,180	
180	13,3	6,980	16,4	8,450	20,1	10,120	24,6	12,040	29,9	14,140	
200	14,7	8,580	18,2	10,420	22,4	12,530	27,4	14,900	33,2	17,450	
225	16,6	10,900	20,5	13,210	25,2	15,860	30,8	18,840	37,4	22,100	
250	18,4	13,420	22,7	16,250	27,9	19,520	34,2	23,250	41,5	27,260	
280	20,6	16,830	25,4	20,370	31,3	24,520	38,3	29,160	46,5	34,200	
315	23,2	21,330	28,6	25,800	35,2	31,030	43,1	36,920	52,3	43,280	
355	26,1	27,040	32,2	32,740	39,7	39,430	48,5	46,830	59,0	55,020	
400	29,4	34,320	36,3	41,590	44,7	50,030	54,7	59,500	66,7	70,030	
450	33,1	43,470	40,9	52,710	50,3	63,340	61,5	75,270			
500	36,8	53,700	45,4	65,020	55,8	78,080					
560	41,2	67,330	50,8	81,490	62,2	97,540					
630	46,3	85,140	57,2	103,210							
710	52,2	108,170	64,5	131,160							
800	58,8	137,300	72,8	166,770							
900	66,2	173,890									
1000	73,5	214,520									
1200											
1400											
1600											


s: Wall Thickness (mm)
MRS: Minimum Required Strength (Mpa)

Unit Weight (kg/m)

C: Safety Coefficient
σ: Design Stress



NORDIC AQUA SOLUTIONS



Nordic Aqua Solutions
Dregårdsvej 2
9330 Dronninglund

Tlf: 41 70 55 55

info@nordicaquasolutions.com

www.nordicaquasolutions.com

